

Shell Taranaki Ltd
Maui Production Station
Monitoring Programme
Annual Report
2016-2017

Technical Report 2017-59

ISSN: 1178-1467 (Online)
Document: 1982668 (Word)
Document: 1985318 (Pdf)

Taranaki Regional Council
Private Bag 713
STRATFORD
March 2018

Executive summary

Shell Taranaki Ltd (STL), formerly Shell Todd Oil Services Ltd, operates the Maui Production Station located on Tai Road, Oaonui, in the Ngapirau catchment. This report for the period July 2016 to June 2017 describes the monitoring programme implemented by the Taranaki Regional Council (the Council) to assess the Company's environmental and consent compliance performance during the period under review. The report also details the results of the monitoring undertaken and assesses the environmental effects of the Company's activities.

The Company holds four resource consents, which include a total of 34 conditions setting out the requirements that the Company must satisfy. STL holds two consents relating to discharges to water, one consent to discharge emissions to the air, and one to maintain a structure in the coastal marine area. Wood Group M & O also holds one consent relating to the Maui Production Station. The consent is for a discharge to water, and has seven conditions setting out requirements that must be satisfied.

During the monitoring period, Shell Taranaki Ltd demonstrated an overall high level of environmental performance.

The Council's monitoring programme for the year under review included six inspections, five water samples collected for physicochemical analysis, one biomonitoring survey of receiving waters, and two ambient air quality analyses.

Receiving water inspections, in conjunction with sampling conducted by both the Council and STL during the 2016-2017 period, showed that the discharges were not causing any adverse effects on the Ngapirau Stream at the time. This was supported by the findings of the macroinvertebrate survey carried out in the stream.

There were no adverse effects noted on the environment resulting from the exercise of the air discharge consents. The ambient air quality monitoring at the Maui Production Station showed that levels of carbon monoxide, combustible gases, PM10 particulates and nitrogen oxides were all below levels of concern at the time of sampling. No offensive or objectionable odours were detected beyond the boundaries during inspections and there were no complaints in relation to air emissions from the sites.

During the period under review, STL demonstrated an overall high level of both environmental performance and administrative compliance with the resource consents. There were no unauthorised incidents recorded by the Council in relation to STL's activities. The Maui Production Station was well managed and maintained.

During the period under review, Wood Group M & O demonstrated a good level of environmental performance and a high level of administrative compliance with the resource consents. There was one unauthorised incident recorded by the Council in relation to Wood Group M & O's activities.

For reference, in the 2016-2017 year, consent holders were found to achieve a high level of environmental performance and compliance for 74% of the consents monitored through the Taranaki tailored monitoring programmes, while for another 21% of the consents, a good level of environmental performance and compliance was achieved.

In terms of overall environmental and compliance performance by the consent holder over the last several years, this report shows that the consent holder's performance remains at a high level.

This report includes recommendations for the 2017-2018 year, including a recommendation relating to an optional review of consent 4052-4.

Table of contents

	Page	
1	Introduction	1
1.1	Compliance monitoring programme reports and the Resource Management Act 1991	1
1.1.1	Introduction	1
1.1.2	Structure of this report	1
1.1.3	The Resource Management Act 1991 and monitoring	1
1.1.4	Evaluation of environmental and administrative performance	2
1.2	Process description	3
1.3	Resource consents	4
1.3.1	Water discharge permits	4
1.3.2	Air discharge permit	5
1.3.3	Coastal permit	6
1.4	Monitoring programme	7
1.4.1	Introduction	7
1.4.2	Programme liaison and management	7
1.4.3	Site inspections	7
1.4.4	Chemical sampling	7
1.4.5	Biomonitoring surveys	8
2	Results	9
2.1	Water	9
2.1.1	Inspections	9
2.1.2	Results of discharge monitoring	10
2.1.3	Results of receiving environment monitoring	14
2.2	Air	15
2.2.1	Inspections	15
2.2.2	Results of receiving environment monitoring	16
2.2.3	Summary of flaring volumes reported by STL	20
2.3	Investigations, interventions, and incidents	20
3	Discussion	22
3.1	Discussion of site performance	22
3.2	Environmental effects of exercise of consents	22
3.3	Evaluation of performance	22
3.4	Recommendations from the 2015-2016 Annual Report	26
3.5	Alterations to monitoring programmes for 2017-2018	27

3.6	Exercise of optional review of consent	27
4	Recommendations	28
	Glossary of common terms and abbreviations	29
	Bibliography and references	31
	Appendix I Resource consents held by Shell Taranaki Ltd and Wood Group M & O	
	Appendix II Biomonitoring report	
	Appendix III Air monitoring report	

List of tables

Table 1	Results of stormwater discharge monitoring from Maui Production Station	11
Table 2	Results of oxidation pond discharge monitoring at Maui Production Station	11
Table 3	Results of combined discharge monitoring from Maui Production Station	12
Table 4	STL Maui Production Station combined discharge results summary for 2016-2017	12
Table 5	Safety Training Centre stormwater discharge results 2016-2017	13
Table 6	Receiving environment results for the Maui Production Station 2016-2017	14
Table 7	Results of carbon monoxide and LEL monitoring at Maui Production Station	17
Table 8	Daily averages of PM10 results from monitoring at Maui Production Station	18
Table 9	Summary of performance for consent 0245-3	22
Table 10	Summary of performance for consent 0246-3	23
Table 11	Summary of performance for consent 1228-4	23
Table 12	Summary of performance for Consent 4052-4	24
Table 13	Summary of performance for Consent 5224-2	25
Table 14	Evaluation of environmental performance over time	26

List of figures

Figure 1	Maui Production Station and associated sampling sites	10
Figure 2	Biomonitoring sites in the Ngapirau Stream adjacent to the Maui Production Station	15
Figure 3	Air monitoring sites at Maui Production Station for 2016-2017	17
Figure 4	Ambient carbon monoxide levels in the vicinity of Maui Production Station	18
Figure 5	PM10 concentrations ($\mu\text{g}/\text{m}^3$) at Maui Production Station	19
Figure 6	Monthly gas flaring for Maui Production Station under consent 4052-4	20

List of photos

Photo 1	Maui Production Station	4
Photo 2	Emission sources at the Maui Production Station	16

1 Introduction

1.1 Compliance monitoring programme reports and the Resource Management Act 1991

1.1.1 Introduction

This report is for the period July 2016 to June 2017 by the Taranaki Regional Council (the Council) on the monitoring programme associated with resource consents held by Shell Taranaki Ltd (STL), formerly Shell Todd Oil Services Ltd. STL operates the Maui Production Station situated on Tai Road, Oaonui.

The report includes the results and findings of the monitoring programme implemented by the Council in respect of the consents held by the Company that relate to discharges of water within the Ngapirau and Oaonui catchments, structures in the coastal marine area, and emissions to air from the site.

One of the intents of the *Resource Management Act 1991* (RMA) is that environmental management should be integrated across all media, so that a consent holder's use of water, air, and land should be considered from a single comprehensive environmental perspective. Accordingly, the Council generally implements integrated environmental monitoring programmes and reports the results of the programmes jointly. This report discusses the environmental effects of the Company's use of water, land and air, and is the 26th combined annual report by the Council for the Maui Production Station.

1.1.2 Structure of this report

Section 1 of this report is a background section. It sets out general information about:

- consent compliance monitoring under the RMA and the Council's obligations;
- the Council's approach to monitoring sites through annual programmes;
- the resource consents held by STL in the Ngapirau and Oaonui catchments;
- the nature of the monitoring programme in place for the period under review; and
- a description of the activities and operations conducted at the Maui Production Station.

Section 2 presents the results of monitoring during the period under review, including scientific and technical data.

Section 3 discusses the results, their interpretations, and their significance for the environment.

Section 4 presents recommendations to be implemented in the 2017-2018 monitoring year.

A glossary of common abbreviations and scientific terms, and a bibliography, are presented at the end of the report.

1.1.3 The Resource Management Act 1991 and monitoring

The RMA primarily addresses environmental 'effects' which are defined as positive or adverse, temporary or permanent, past, present or future, or cumulative. Effects may arise in relation to:

- a. the neighbourhood or the wider community around an activity, and may include cultural and social-economic effects;
- b. physical effects on the locality, including landscape, amenity and visual effects;
- c. ecosystems, including effects on plants, animals, or habitats, whether aquatic or terrestrial;
- d. natural and physical resources having special significance (for example recreational, cultural, or aesthetic); and

- e. risks to the neighbourhood or environment.

In drafting and reviewing conditions on discharge permits, and in implementing monitoring programmes, the Council is recognising the comprehensive meaning of 'effects' inasmuch as is appropriate for each activity. Monitoring programmes are not only based on existing permit conditions, but also on the obligations of the RMA to assess the effects of the exercise of consents. In accordance with Section 35 of the RMA, the Council undertakes compliance monitoring for consents and rules in regional plans, and maintains an overview of the performance of resource users and consent holders. Compliance monitoring, including both activity and impact monitoring, enables the Council to continually re-evaluate its approach and that of consent holders to resource management and, ultimately, through the refinement of methods and considered responsible resource utilisation, to move closer to achieving sustainable development of the region's resources.

1.1.4 Evaluation of environmental and administrative performance

Besides discussing the various details of the performance and extent of compliance by the Company, this report also assigns them a rating for their environmental and administrative performance during the period under review.

Environmental performance is concerned with actual or likely effects on the receiving environment from the activities during the monitoring year. Administrative performance is concerned with the Company's approach to demonstrating consent compliance in site operations and management including the timely provision of information to Council (such as contingency plans and water take data) in accordance with consent conditions.

Events that were beyond the control of the consent holder and unforeseeable (that is a defence under the provisions of the RMA can be established) may be excluded with regard to the performance rating applied. For example loss of data due to a flood destroying deployed field equipment.

The categories used by the Council for this monitoring period, and their interpretation, are as follows:

Environmental Performance

High: No or inconsequential (short-term duration, less than minor in severity) breaches of consent or regional plan parameters resulting from the activity; no adverse effects of significance noted or likely in the receiving environment. The Council did not record any verified unauthorised incidents involving significant environmental impacts and was not obliged to issue any abatement notices or infringement notices in relation to such impacts.

Good: Likely or actual adverse effects of activities on the receiving environment were negligible or minor at most. There were some such issues noted during monitoring, from self reports, or in response to unauthorised incident reports, but these items were not critical, and follow-up inspections showed they have been dealt with. These minor issues were resolved positively, co-operatively, and quickly. The Council was not obliged to issue any abatement notices or infringement notices in relation to the minor non-compliant effects; however abatement notices may have been issued to mitigate an identified potential for an environmental effect to occur.

For example:

- High suspended solid values recorded in discharge samples, however the discharge was to land or to receiving waters that were in high flow at the time;
- Strong odour beyond boundary but no residential properties or other recipient nearby.

Improvement required: Likely or actual adverse effects of activities on the receiving environment were more than minor, but not substantial. There were some issues noted during monitoring, from self

reports, or in response to unauthorised incident reports. Cumulative adverse effects of a persistent minor non-compliant activity could elevate a minor issue to this level. Abatement notices and infringement notices may have been issued in respect of effects.

Poor: Likely or actual adverse effects of activities on the receiving environment were significant. There were some items noted during monitoring, from self reports, or in response to unauthorised incident reports. Cumulative adverse effects of a persistent moderate non-compliant activity could elevate an 'improvement required' issue to this level. Typically there were grounds for either a prosecution or an infringement notice in respect of effects.

Administrative performance

High: The administrative requirements of the resource consents were met, or any failure to do this had trivial consequences and were addressed promptly and co-operatively.

Good: Perhaps some administrative requirements of the resource consents were not met at a particular time, however this was addressed without repeated interventions from the Council staff. Alternatively adequate reason was provided for matters such as the no or late provision of information, interpretation of 'best practical option' for avoiding potential effects, etc.

Improvement required: Repeated interventions to meet the administrative requirements of the resource consents were made by Council staff. These matters took some time to resolve, or remained unresolved at the end of the period under review. The Council may have issued an abatement notice to attain compliance.

Poor: Material failings to meet the administrative requirements of the resource consents. Significant intervention by the Council was required. Typically there were grounds for an infringement notice.

For reference, in the 2016-2017 year, consent holders were found to achieve a high level of environmental performance and compliance for 74% of the consents monitored through the Taranaki tailored monitoring programmes, while for another 21% of the consents, a good level of environmental performance and compliance was achieved.

1.2 Process description

The onshore Maui Production Station at Oaonui was built to process gas and condensate from the offshore Maui Field. Exploration of the Maui field began in 1969, and production commenced in 1979 from the Maui-A platform. Gas and condensate is transported 33 km from the offshore Maui-A platform to the onshore Maui Production Station via submarine pipelines. Another platform, Maui-B, was installed in 1992. Gas and condensate from Maui-B is piped 15 km to Maui-A for initial separation, and then to the production station.

The Maui Production Station separates the various hydrocarbon components, mainly by distillation. The production station supplies natural gas to the national grid and liquefied petroleum gas (LPG) is transported off-site by road tankers. Condensate is piped to storage tanks at Omata.

Facilities at the Maui Production Station include: an administration building and workshop which accommodates the control room on the upper floor; glycol trains and oil heaters located in the north west portion of the site; fractionation trains, gas trains and compressor houses; condensate storage, LPG storage and LPG load out facilities; and a flare compound that contains a 55 metre high flare stack, a radio tower, and a flare seal recovery system, located in the south western corner of the site.

The plant formerly used two flares as essential plant safety features designed to combust excess gas during planned maintenance activities, and emergency situations. A change to plant management has seen this reduced to one flare. The flare continuously burns fuel gas as a purge to prevent air ingress to the flare system (thus avoiding an explosion risk) and to maintain a pilot flame at the flare tip.

The Council is responsible for monitoring the onshore production station and pipelines within the coastal marine area (to 12 nautical miles). Monitoring of the offshore Maui-A and B platforms does not come under the jurisdiction of the Council as they are situated outside the coastal marine area.



Photo 1 Maui Production Station

1.3 Resource consents

1.3.1 Water discharge permits

Section 15(1)(a) of the RMA stipulates that no person may discharge any contaminant into water, unless the activity is expressly allowed for by a resource consent or a rule in a regional plan, or by national regulations.

STL holds water discharge permit **0245-3** to discharge treated stormwater from the Maui Production Station to the Ngapirau Stream. The permit was first granted in 1975. The latest renewal was issued by the Council on 11 October 2000 under Section 87(e) of the RMA. A variation to the special conditions was approved on 4 September 2013 to align the limit on suspended solids in the discharge with modern consent conditions and standards in the Council's Regional Fresh Water Plan. The consent is due to expire on 1 June 2018.

There are 6 special conditions attached to this consent.

Condition 1 requires an oily water separator and stormwater oil trap.

Conditions 2 and 3 impose limits on contaminants (hydrocarbons and suspended solids) in the discharge, and stipulate effects the discharge shall not give rise to in the Ngapirau Stream.

Condition 4 requires a contingency plan to be maintained.

Conditions 5 and 6 are review provisions.

STL also holds water discharge permit **0246-3** to discharge treated domestic effluent from the oxidation ponds at the Maui Production Station to the Ngapirau Stream. The permit was first granted in 1975. The

latest renewal was issued by the Council on 11 October 2000 under Section 87(e) of the RMA. It is due to expire on 1 June 2018.

There are 6 special conditions attached to this consent.

Condition 1 requires the oxidation ponds to be properly and efficiently maintained to ensure consent conditions are met.

Condition 2 stipulates effects the discharge shall not give rise to in the Ngapirau Stream.

Condition 3 required the treatment system to be upgraded by 30 November 2000.

Conditions 4, 5, and 6 are review provisions.

Wood Group M & O holds water discharge permit **1228-4** to discharge treated stormwater and wastewater from fire-fighting at the Fire Training Centre at the Maui Production Station to the Oaonui Stream. The permit was first granted in 1975. The latest renewal was issued by the Council on 11 October 2000 under Section 87(e) of the RMA. It is due to expire on 1 June 2018. STL previously held this discharge permit. As the consent relates to the Maui site it is commented upon as part of this report.

There are 7 special conditions attached to this consent.

Condition 1 requires the settling ponds to be operated and maintained to meet the conditions of this consent.

Conditions 2 to 4 impose limits on contaminants, and stipulate effects the discharge shall not give rise to in the receiving water.

Condition 5 requires a contingency plan to be maintained.

Conditions 6 and 7 are review provisions.

The permits are attached to this report in Appendix I.

1.3.2 Air discharge permit

Section 15(1)(c) of the RMA stipulates that no person may discharge any contaminant from any industrial or trade premises into air, unless the activity is expressly allowed for by a resource consent, a rule in a regional plan, or by national regulations.

STL holds air discharge permit **4052-4** to discharge emissions into the air from the refining and distribution of hydrocarbons and associated processes at the Maui Production Station site. The current permit was issued by the Council on 9 January 2003 under Section 87(e) of the RMA. It was subsequently amended on 7 April 2005 to remove reference to carbon dioxide emissions in condition 5 after an amendment to the RMA. It was subsequently amended on 26 August 2005 through insertion of a new condition 10, along with amendments to conditions 5 and 18 (previously condition 17), to include emissions from a carbon dioxide removal plant. A change to special condition 5 was requested by STL and made on 9 August 2013 to move the due date for annual reporting from May to August. The consent is due to expire on 1 June 2024.

There are 18 special conditions attached to this consent.

Condition 1 requires the consent holder to adopt the best practicable option.

Condition 2 states that the consent holder shall minimise emissions to air by ensuring the proper and effective operation of equipment and processes.

Condition 3 requires the use of equipment to avoid, remedy or mitigate any effect on the environment.

Condition 4 requires the consent holder to undertake effective liquid separation and recovery.

Condition 5 states that the consent holder must provide the Council with a report, in August each year detailing measures to reduce emissions, gas combustion, plant efficiency, etc.

Condition 6 states that there shall be no offensive or objectionable odour beyond the boundary of the site.

Condition 7 requires the consent holder to control all emissions of sulphur dioxide to the atmosphere.

Condition 8 requires the consent holder to control all emissions of nitrogen oxides to the atmosphere.

Condition 9 requires the consent holder to control all emissions of carbon monoxide to the atmosphere.

Condition 10 states that the consent holder shall control all emissions of benzene to the atmosphere.

Condition 11 requires that the consent holder shall control all other emissions to the air from the site.

Condition 12 requires the consent holder to obtain approval from the Council prior to undertaking any significant alterations to the plant or equipment.

Condition 13 requires the consent holder to notify the Council whenever flaring is expected to occur for more than five minutes.

Condition 14 requires notification of any incident that has an impact or a potential impact, within one week of the incident.

Conditions 15 and 16 require the consent holder to keep records of all smoke emitting incidents and continuous flaring incidents.

Condition 17 states that depressurisation of the plant shall be undertaken so that emissions of smoke are minimised.

Condition 18 is a review provision.

The permit is attached to this report in Appendix I.

1.3.3 Coastal permit

Section 12(1)(b) of the RMA stipulates that no person may, in the coastal marine area, erect, reconstruct, place, alter, extend, remove, or demolish any structure or any part of a structure that is fixed in, on, under, or over any foreshore or seabed, unless the activity is expressly allowed for by a resource consent, a rule in a regional plan, or by national regulations.

STL holds coastal permit **5224-2** to place and maintain two pipelines in, under and over the foreshore and seabed in the coastal marine area between mean high water spring and the outer limit of the territorial sea. The current permit was granted by the Council on 10 March 1998 under Section 87(c) of the RMA. It is due to expire on 1 June 2025.

There are 4 special conditions attached to this consent.

Condition 1 requires STL to notify the Council prior to maintenance works.

Condition 2 stipulates that during maintenance works STL must minimise disturbance, and prevent the discharge of silt, debris, and contaminants to the coastal marine area.

Condition 3 requires the structures to be removed (where practicable) and the area reinstated if and when the structures are no longer required.

Condition 4 is a review provision.

The permit is attached to this report in Appendix I.

This summary of consent conditions may not reflect the full requirements of each condition. The consent conditions in full can be found in the resource consent which is appended to this report.

1.4 Monitoring programme

1.4.1 Introduction

Section 35 of the RMA sets obligations upon the Council to gather information, monitor and conduct research on the exercise of resource consents within the Taranaki region. The Council is also required to assess the effects arising from the exercising of these consents and report upon them.

The Council may therefore make and record measurements of physical and chemical parameters, take samples for analysis, carry out surveys and inspections, conduct investigations and seek information from consent holders.

The monitoring programme for the Maui Production Station consisted of four primary components.

1.4.2 Programme liaison and management

There is generally a significant investment of time and resources by the Council in:

- ongoing liaison with resource consent holders over consent conditions and their interpretation and application;
- in discussion over monitoring requirements;
- preparation for any consent reviews, renewals or new consent applications;
- advice on the Council's environmental management strategies and content of regional plans; and
- consultation on associated matters.

1.4.3 Site inspections

The Maui Production Station was visited six times during the monitoring period. With regard to consents for the discharge to water, the main points of interest were plant processes with potential or actual discharges to receiving watercourses, including contaminated stormwater and process wastewaters. Air inspections focused on plant processes with associated actual and potential emission sources and characteristics, including potential odour, dust, noxious or offensive emissions. Sources of data being collected by the Company were identified and accessed, so that performance in respect of operation, internal monitoring, and supervision could be reviewed by the Council. The neighbourhood was surveyed for environmental effects.

1.4.4 Chemical sampling

The Council undertook sampling of both the discharges from the site and the water quality upstream and downstream of the discharge point and mixing zone.

The Production Station discharge was sampled once, and the sample analysed for ammoniacal nitrogen, conductivity, chlorides, enterococci bacteria, faecal coliforms, hydrocarbons, pH, suspended solids and turbidity. The Ngapirau Stream was sampled concurrently, and the samples analysed for the same constituents as the discharges.

The Council also undertook sampling of the ambient air quality outside the boundary of the site. A multi-gas meter was deployed on one occasion in the vicinity of each plant, with monitoring consisting of continuous measurements of gas concentrations for the gases of interest (carbon monoxide and combustible gases). A PM10 particulate monitor was deployed concurrently with the multi-gas meter. Two nitrogen oxide measuring devices were also deployed in the vicinity of the plant on one occasion during the year under review. STL supplied data on flaring causes and flare volumes throughout the period.

1.4.5 Biomonitoring surveys

A biological survey was performed once in the Ngapirau Stream to determine whether or not the discharge of stormwater from the site has had a detrimental effect upon the communities of the stream.

2 Results

2.1 Water

2.1.1 Inspections

Six inspections were carried out at the Maui Production Station during the 2016-2017 period. The following was found during the inspections:

25 August 2016

The site inspection focused mainly on the stormwater treatment system and its discharge into the Ngapirau stream. The separator system was clear of all contaminants and the water was very clean. A routine daily inspection is undertaken by STL staff to ensure that the system is operating effectively.

Minimal flaring was being undertaken and no smoke or odours were noted.

6 October 2016

A site inspection was undertaken during inclement weather, with strong winds and heavy showers. The discharge from the stormwater separator to the Ngapirau Stream was above normal, however the water was relatively clear, demonstrating that silt and sediment runoff controls were effective. The discharge from the sewage into the lateral drain did not give rise to any instream effects.

No flaring was evident during the inspection and no odours or smoke were noted.

23 January 2017

The site was inspected after a weekend of turbulent weather, including very high rainfall. The stormwater system and final discharge into the Ngapirau stream showed evidence of the excess stormwater, with trapped vegetation observed. The consent holder was advised to remove this to retain the integrity of the system. The fire water pond and area were clear of contaminants.

Minimal flaring was being undertaken and no smoke or odours were noted.

27 February 2017

The site was found to be neat and tidy and well managed. All ring drains and bunds were clear. Aerators were active in the sewage ponds and no effects were noted from this discharge.

The stormwater system was clean.

Minimal flaring was observed and no odours or smoke were noted.

27 April 2017

The site was visited after a period of fine weather. The stormwater system was clear of contaminants, with ring drains and bunds secure.

Some normal flaring odours were noted and some light smoke.

6 June 2017

A site inspection was undertaken during fine weather. Ring drains and bunds were clear and the oily water separator was working well. Water quality in the final API separator was visually very clear, with no sign of any contaminants or hydrocarbon sheen.

A pilot flare was observed, with no smoke or odours noted.

2.1.2 Results of discharge monitoring

2.1.2.1 Site stormwater

The stormwater network at the Maui Production Station consists of open stormwater drains around the site perimeter and stormwater pipelines from the process areas. The perimeter drains also accept stormwater runoff from Tai Road and a number of adjoining farms. The main internal discharges are into the open stormwater drains at several separate points. Stormwater from the internal catchment passes through the oily water separator before moving on to the secondary oil trap located at the south-west corner of the site.

The stormwater from inside the bunded areas does not enter into the stormwater drains and is directed straight to the oily waste separator. The stormwater in the perimeter drains goes directly to the secondary oil trap. The treated stormwater then flows to a tributary drain which discharges to the Ngapirau Stream.

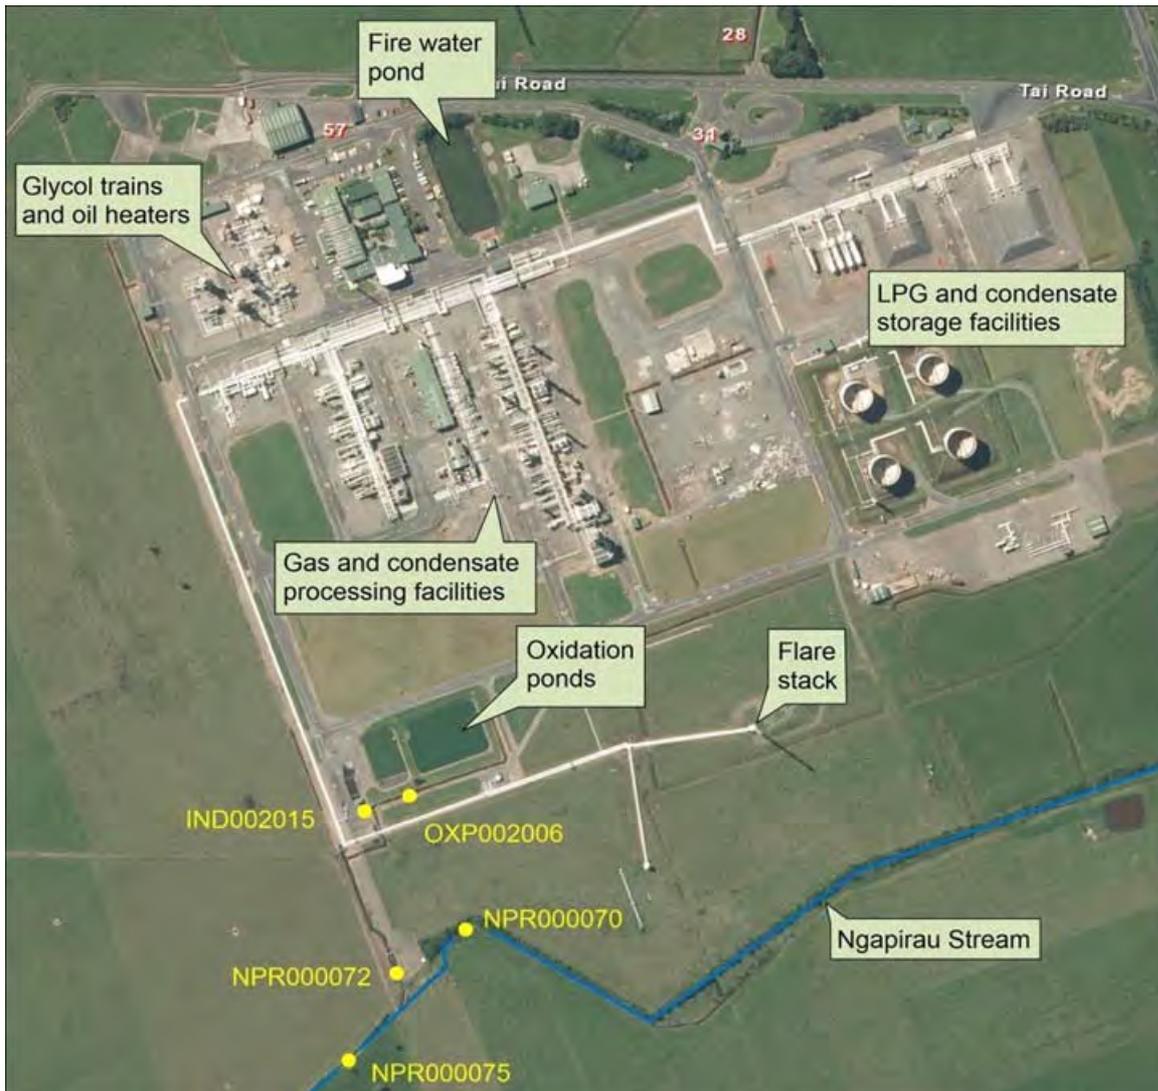


Figure 1 Maui Production Station and associated sampling sites

Chemical water quality sampling of the treated stormwater discharge from the production station was undertaken once during the 2016-2017 period. The location of the sampling site (IND002015) is shown in Figure 1. Table 1 presents the results of this sampling.

Table 1 Results of stormwater discharge monitoring from Maui Production Station

Parameter	Units	2 November 2016	Consent limits
Chloride	g/m ³	30.7	-
Conductivity	mS/m	20.6	-
Hydrocarbons	g/m ³	<0.5	15
Suspended solids	g/m ³	7	100
pH		7.1	-
Turbidity	NTU	9.9	-

All measured parameters were within the limits stipulated by consent 0245-3 and were indicative of a clean discharge.

2.1.2.2 Domestic wastewater

STL have treated their domestic sewage on site since 1979 using a two-pond aerobic oxidation system. The discharge is to a perimeter drain, which flows to an oily water separator where it combines with the site stormwater before being discharged to the Ngapirau Stream. The discharge to the perimeter drain was sampled once during the monitoring period. The results are presented in Table 2 and the sampling site (OXP002006) is shown in Figure 1.

Table 2 Results of oxidation pond discharge monitoring at Maui Production Station

Parameter	Units	2 November 2016	Site median	Site maximum
Conductivity	mS/m	17.1	25.7	46.2
Enterococci bacteria	/100 ml	83	290	10,000
Faecal coliforms	/100 ml	190	545	7,100
Ammoniacal nitrogen	g/m ³ N	0.049	1.84	14.6
Suspended solids	g/m ³	6	24	150
pH		7.3	7.2	10.0
Turbidity	NTU	6.0	13	57

Consent 0246-3, which authorises the oxidation pond discharge, does not specify any numerical limits on its constituents. However, it does require that adverse effects be prevented. The results for the period under review were typical of well-treated oxidation pond effluent which would not be expected to cause more than minor off site effects. There is also significant on site dilution of the discharge, provided by combination with the site stormwater discharge prior to reaching the Ngapirau Stream.

2.1.2.3 Combined discharge

The combined discharge from the site includes the treated stormwater discharge from process areas, the oxidation pond discharge and runoff collected in perimeter drains. It passes through a separator before entering the Ngapirau Stream. The sampling point is in the tributary between the production station site boundary and the Ngapirau Stream (site NPR000072, Figure 1). It was sampled once during the period under review. The results of this sampling are presented in Table 3.

Table 3 Results of combined discharge monitoring from Maui Production Station

Parameter	Units	2 November 2016	Site median	Site maximum
Conductivity	mS/m	18.9	23.5	30.6
Enterococci bacteria	/100 ml	260	105	7,700
Faecal coliforms	/100 ml	1,800	120	12,000
Hydrocarbons	g/m ³	<0.5	<0.5	5.2
Ammoniacal nitrogen	g/m ³ N	0.541	0.118	0.584
Suspended solids	g/m ³	<2	4	19
pH		7.3	7.2	7.9
Chloride	g/m ³	34.9	29.8	34.0
Turbidity	NTU	3.1	4.7	9.7

The results comply with all applicable consent conditions and indicate a reasonably clean discharge with low suspended solids and no detectable hydrocarbons. This is complemented by the results of the concurrent receiving water sampling shown in Table 6.

Every month, STL provided the Council with the results for daily composite samples of the combined stormwater and oxidation ponds discharge, sampled downstream of the final separator. The results are summarised in Table 4.

Table 4 STL Maui Production Station combined discharge results summary for 2016-2017

Month	Hydrocarbons (g/m ³)		Suspended solids (g/m ³)		Glycol (g/m ³)	
	Max	Average	Max	Average	Max	Average
<i>Consent 0245-3 limits</i>	<i>15</i>		<i>100</i>			
July 2016	<0.5	<0.5	5	3	<1*	0
August 2016	<0.5	<0.5	31	7	0	0
September 2016	<0.5	<0.5	12	5	6*	0
October 2016	4	<0.5	42	9	0	0
November 2016	<0.5	<0.5	81	14	0	0
December 2016	<0.5	<0.5	58	17	0	0
January 2017	<0.5	<0.5	38	16	0	0
February 2017	<0.5	<0.5	33	10	0	0
March 2017	<0.5	<0.5	22	10	0	0
April 2017	<0.5	<0.5	50	13	0	0
May 2017	<0.5	<0.5	28	10	0	0
June 2017	<0.5	<0.5	31	7	0	0
Days limit exceeded	0		0		No limit	

* In four of the daily samples taken in July and September glycol was present but below the reporting limit of 1 g/m³.

Both hydrocarbon and suspended solid results were low on average and below the limit stipulated by consent 0245-3 throughout the monitoring period.

There was one glycol detection of 6 g/m³ in September, and in four of the daily samples taken in July and September glycol was present but below the reporting limit of 1 g/m³.

2.1.2.4 Fire-fighting, stormwater and wastewater discharge

Wood Group M & O operates a Fire Training Centre adjacent to the production station, to train personnel for fire and helicopter crash response. Fire training exercises are carried out approximately 25 times per year. Hydrocarbons (mainly LPG) are used as accelerants in training exercises. The residues accumulate in the first holding and settling pond, along with the wastewater used during exercises and stormwater.

The discharge is taken from the second pond from below the surface (to prevent entrainment of any hydrocarbon sheen) and flows to the Oaonui Stream. The wastewater and stormwater is held in the ponds for a varying amount of time depending on rainfall. Discharge only occurs when the ponds are full, which is usually only once or twice per month due to low inflow volumes and evaporation.

The facility is inspected regularly as part of the Council's monitoring programme for the Maui Production Station. The ponds are also checked for any discharges in conjunction with sampling at the production station. No samples were collected in the 2016-2017 period, as there were no discharges sighted during inspections.

STL samples the water in the ponds for hydrocarbon and suspended solids analyses prior to discharge. The results are provided to the Council and are presented in Table 5.

Table 5 Safety Training Centre stormwater discharge results 2016-2017

Date	Hydrocarbons (g/m ³)	Suspended solids (g/m ³)
Consent 1228-4 limits	15	50
18 July 2016	<2	48
1 August 2016	<2	12
8 August 2016	<2	23
5 September 2016	<2	16
26 September 2016	<2	8
31 October 2016	<2	21
14 November 2016	<2	38
29 November 2016	<2	51
10 January 2017	<2	73
7 February 2017	<2	21
15 February 2017	<2	10
16 March 2017	<2	49
5 April 2017	<2	80
12 April 2017	<2	67
18 April 2017	<2	27
2 May 2017	2.3	42
29 May 2017	<0.5	14
Median (and maximum) values	<0.5 (2.3)	27 (80)

The STL monitoring results show that the discharge was usually in compliance with consent conditions. Although the suspended solids concentration exceeded the 50 g/m³ consent limit in four of the samples, the results were all under 100 g/m³ which is the limit set on new consents and for permitted activities under the Council's current Regional Fresh Water Plan. Discharges from the Fire Training Centre were unlikely to have caused any adverse effects in the Oaonui Stream.

2.1.3 Results of receiving environment monitoring

2.1.3.1 Chemical

The receiving stream for the treated stormwater and oxidation pond discharge, the Ngapirau Stream, arises from springs approximately four kilometres above the production station and meets the coast between the Okaweu and Oaonui Streams approximately two kilometres from the production station.

Receiving water quality sampling was undertaken in conjunction with discharge sampling at points upstream (NPR000070) and downstream (NPR000075) of the discharge. The results are shown in Table 6, and the sampling sites are shown in Figure 1.

Table 6 Receiving environment results for the Maui Production Station 2016-2017

Parameter	Units	2 November 2016	
		Upstream	Downstream
Conductivity	mS/m	28.8	22.6
Enterococci bacteria	/100 ml	240	250
Faecal coliforms	/100 ml	610	670
Hydrocarbons	g/m ³	<0.5	<0.5
Ammoniacal nitrogen	g/m ³ N	0.131	0.366
Turbidity	NTU	3.8	2.6
pH		7.2	7.3
Chloride	g/m ³	45.2	34.7
Suspended solids	g/m ³	6	3

There was very little difference in the results of upstream compared with downstream, and in some cases water quality improved below the discharge. The poor water quality of the stream above the production station discharge is most likely related to dominant effects from surrounding dairy farming activities within a small catchment area.

2.1.3.2 Biomonitoring

The Council's standard 'streambed-kick' technique was used at two established sites (NPR000100 and NPR000190, Figure 2) to collect streambed macroinvertebrates from an unnamed coastal stream on 22 February 2017. Samples were sorted and identified to provide number of taxa (richness) and MCI and SQMCI_s scores for each site.

The MCI is a measure of the overall sensitivity of the macroinvertebrate community to the effects of organic pollution in stony streams. It is based on the presence/absence of taxa with varying degrees of sensitivity to pollution and may reveal more subtle changes in communities, particularly if non-organic impacts are occurring. Significant differences in either the MCI or the SQMCI between sites indicate the degree of adverse effects (if any) of the discharges being monitored.

The mid-summer macroinvertebrate survey indicated that the discharge of treated wastes from the Maui Production Station site had not had any significant detrimental effect on the macroinvertebrate communities of the stream in comparison with the historical condition of these communities to date. The macroinvertebrate communities found at two sites downstream of the site discharge reflected the poor habitat present during a period of low flow conditions in summer, but also indicated that the water quality that preceded this survey was well above average.

The macroinvertebrate communities of the stream contained few 'sensitive' taxa. However, two 'sensitive' taxa were found in abundance at site 2, and one at site 3. At both sites, taxonomic richness (number of taxa) was similar to the long-term median, although there was a reduction in richness between sites 2 and 3. The MCI scores were the highest recorded to date at these sites. Similarly, the SQMCI₅ scores recorded at both sites were the also amongst the highest recorded to date for these sites, with most of these high results recorded in recent surveys. This indicates ongoing improvement in water quality and/or instream habitat.

The MCI and SQMCI₅ scores indicated that the stream communities were of well above average but still 'poor' to fair 'health', although would be typical of communities in drain-like habitats in early summer.

The full biomonitoring report is attached to this report in Appendix II.

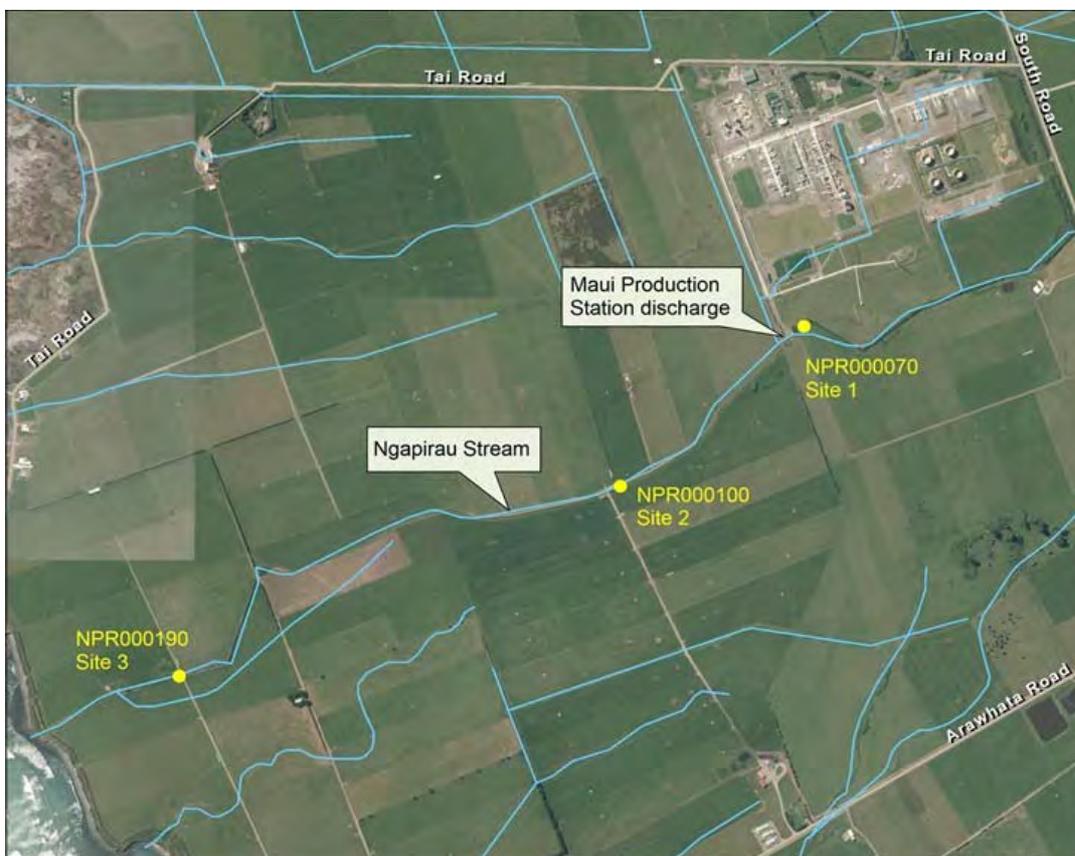


Figure 2 Biomonitoring sites in the Ngapirau Stream adjacent to the Maui Production Station

2.2 Air

2.2.1 Inspections

Air inspections were carried out in conjunction with site inspections as discussed in section 2.1.1 above. Air discharges were all found to be satisfactory, and no offensive, obnoxious or objectionable odours were noted during the inspections.



Photo 2 Emission sources at the Maui Production Station

2.2.2 Results of receiving environment monitoring

2.2.2.1 Deposition gauging

2.2.2.2 Carbon monoxide and combustible gases

During the monitoring year, a multi-gas meter was deployed on one occasion in the vicinity of the plant. The deployment lasted approximately 72 hours, with the instrument placed in a downwind position at the start of the deployment. Monitoring consisted of continuous measurements of gas concentrations for the gases of interest (carbon monoxide and combustible gases). The monitoring sites used in the year under review are shown in Figure 3.

Because of the nature of the activities on the site, it was considered that the primary information of interest in respect of gases potentially emitted from the site was the average downwind concentration, rather than any instantaneous peak value. That is, the long-term exposure levels, rather than short-term maxima, are of most interest. The gas meter was therefore set up to create a data set based on recording the average concentration measured during each minute as raw data.



Figure 3 Air monitoring sites at Maui Production Station for 2016-2017

The details of the sample run are summarised in Table 7 and the data from the sample run are presented graphically in Figure 4.

Table 7 Results of carbon monoxide and LEL monitoring at Maui Production Station

Period (from-to)		11 to 14 August 2016 (72 hours)
Max	CO(ppm)	11.7
	LEL(%)	0.20
Mean	CO(ppm)	0.50
	LEL(%)	0.00
Min	CO(ppm)	0.00
	LEL(%)	0.00

Notes: (1) the instrument records in units of ppm. At 25°C and 1 atm, 1ppm CO = 1.145 mg/m³
 (2) because the LEL of methane is equivalent to a mixture of approximately 5% methane in air, then the actual concentration of methane in air can be obtained by dividing the percentage LEL by 20.

The consent covering air discharges from the Maui Production Station has specific limits related to particular gases. Special condition 9 of consent 4052-4 sets a limit on the carbon monoxide concentration at or beyond the production station's boundary. The limit is expressed as 10 mg/m³ for an eight hour average or 30 mg/m³ for a one hour average exposure. The maximum concentration of carbon monoxide found during the monitoring run was 13.4 mg/m³ while the average concentration for the entire dataset was 0.6 mg/m³ which comply with consent conditions. This is in line with the pattern found in previous years.

Lower Explosive Limit (LEL) gives the percentage of the lower explosive limit, expressed as methane that is detected in the air sampled. The sensor on the instrument reacts to gases and vapours such as acetone, benzene, butane, methane, propane, carbon monoxide, ethanol, and higher alkanes and alkenes, with varying degrees of sensitivity. The Council's Regional Air Quality Plan has a typical requirement that no discharge shall result in dangerous levels of airborne contaminants, including any risk of explosion. At no time did the level of explosive gases downwind of the Maui Production Station reach any more than a trivial level.

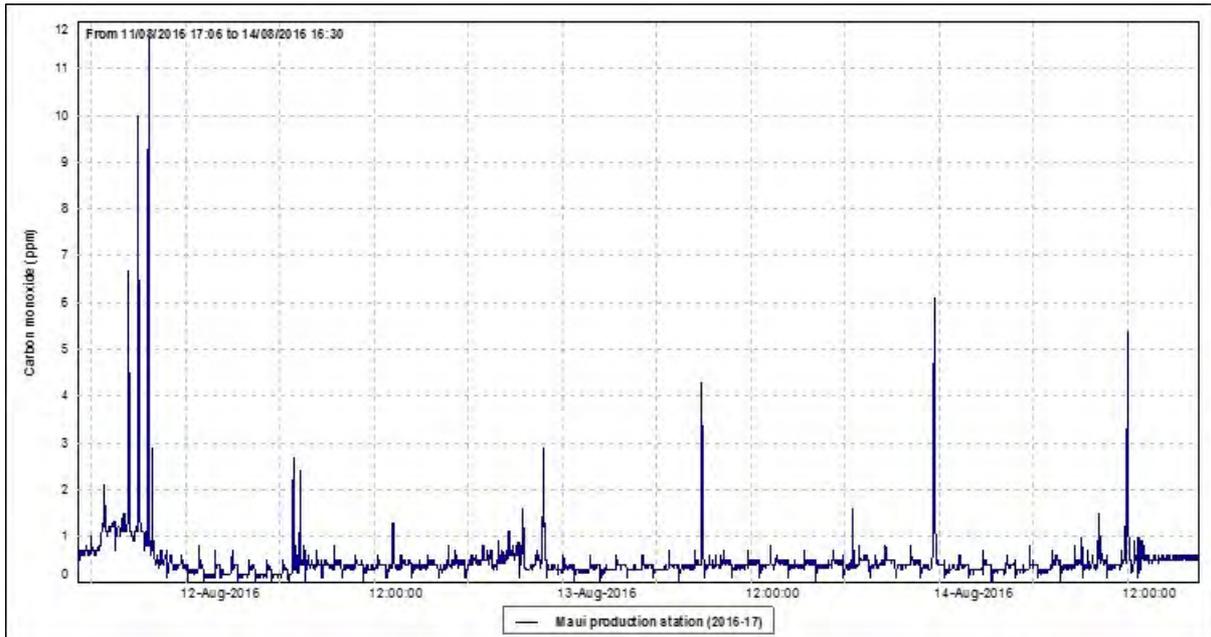


Figure 4 Ambient carbon monoxide levels in the vicinity of Maui Production Station

2.2.2.3 PM10 particulates

In September 2004 the Ministry for the Environment enacted National Environmental Standards (NESs) relating to certain air pollutants. The NES for PM10 particulates is $50 \mu\text{g}/\text{m}^3$ (24 hour average).

Particulates can be derived from many sources, including motor vehicles (particularly diesel), solid and oil-burning processes for industry and power generation, incineration and waste burning, photochemical processes, and natural sources such as pollen, abrasion, and sea spray.

PM10 particles are linked to adverse health effects that arise primarily from the ability of particles of this size to penetrate the defences of the human body and enter deep into the lungs, significantly reducing the exchange of gases across the lung walls. Health effects from inhaling PM10 include increased mortality and the aggravation of existing respiratory and cardiovascular conditions such as asthma and chronic pulmonary diseases.

During the reporting period, a DustTrak PM10 monitor was deployed on one occasion in the vicinity of Maui Production Station. The deployment lasted approximately 31 hours, with the instrument placed in a down-wind position at the start of the deployment. Monitoring consisted of continual measurements of PM10 concentrations. The location of the DustTrak monitor during the sampling run is shown in Figure 3. The results of the sample run are presented in Table 8 and Figure 5.

Table 8 Daily averages of PM10 results from monitoring at Maui Production Station

	11 to 13 August 2016 (31 hours)	
24 hr. set	Day 1	Day 2
Daily average	$23.0 \mu\text{g}/\text{m}^3$	$11.2 \mu\text{g}/\text{m}^3$
NES	$50 \mu\text{g}/\text{m}^3$	

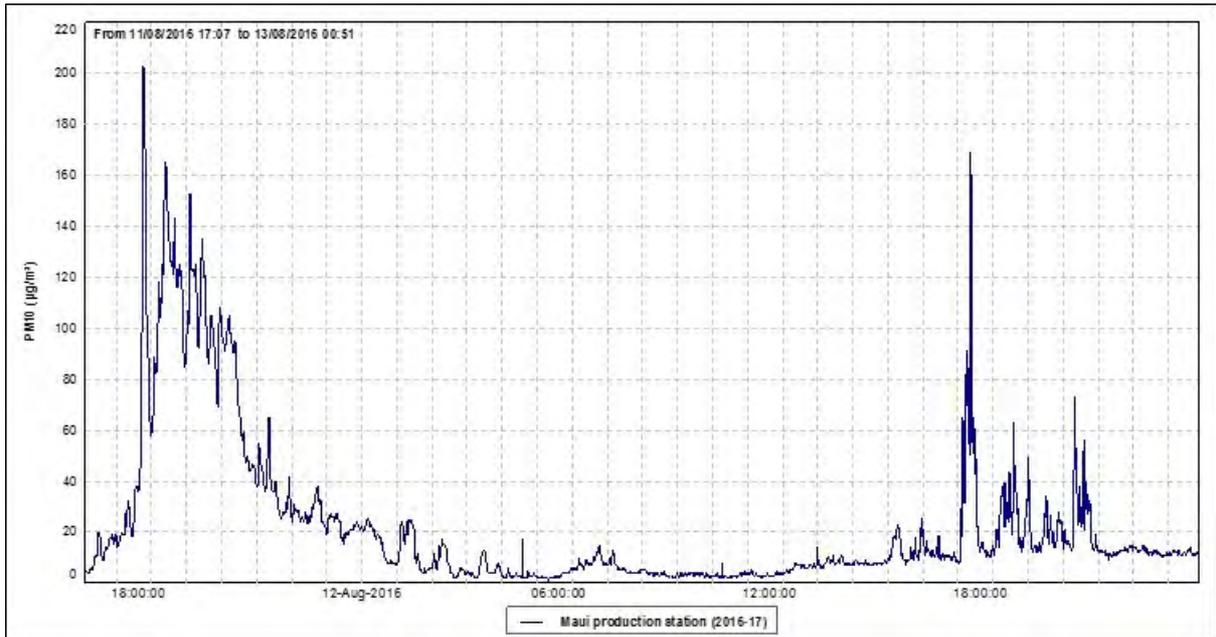


Figure 5 PM10 concentrations ($\mu\text{g}/\text{m}^3$) at Maui Production Station

During the 31 hour run, from 11 to 13 August 2016, the average recorded PM10 concentration was $23 \mu\text{g}/\text{m}^3$ for the first 24 hour period and $11 \mu\text{g}/\text{m}^3$ for the second 24 hour period. These daily averages equate to 46% and 22%, respectively, of the $50 \mu\text{g}/\text{m}^3$ value that is set by the NES. Background levels of PM10 in the region have been found to be typically around $11 \mu\text{g}/\text{m}^3$.

2.2.2.4 Nitrogen oxides

From 2014 onwards, the Council implemented a coordinated region-wide compliance monitoring programme to measure nitrogen oxides (NOx). The programme involves deploying measuring devices at 28 NOx monitoring sites (including two sites in the vicinity of Maui Production Station) on the same day, with retrieval three weeks later. This approach assists the Council in further evaluating the effects of local and regional emission sources and ambient air quality in the region.

The consent covering air discharges from the Maui Production Station has specific limits related to particular gases. Special condition 8 of consent 4052-4 sets a limit on the nitrogen dioxide concentration at or beyond the production station's boundary. The limit is expressed as $200 \mu\text{g}/\text{m}^3$ for a one hour average or $100 \mu\text{g}/\text{m}^3$ for a 24 hour average exposure.

NOx passive adsorption discs were placed at two locations in the vicinity of the Maui Production Station on one occasion during the year under review. The discs were left in place for a period of 21 days. The calculated one hour and 24 hour theoretical maximum NOx concentrations found at Maui Production Station during the year under review equate to $0.9 \mu\text{g}/\text{m}^3$ and $0.5 \mu\text{g}/\text{m}^3$, respectively. The results show that the ambient ground level concentration of NOx is well below the limits set out by consent 4052-4.

The full air monitoring report is attached to this report in Appendix III.

2.2.3 Summary of flaring volumes reported by STL

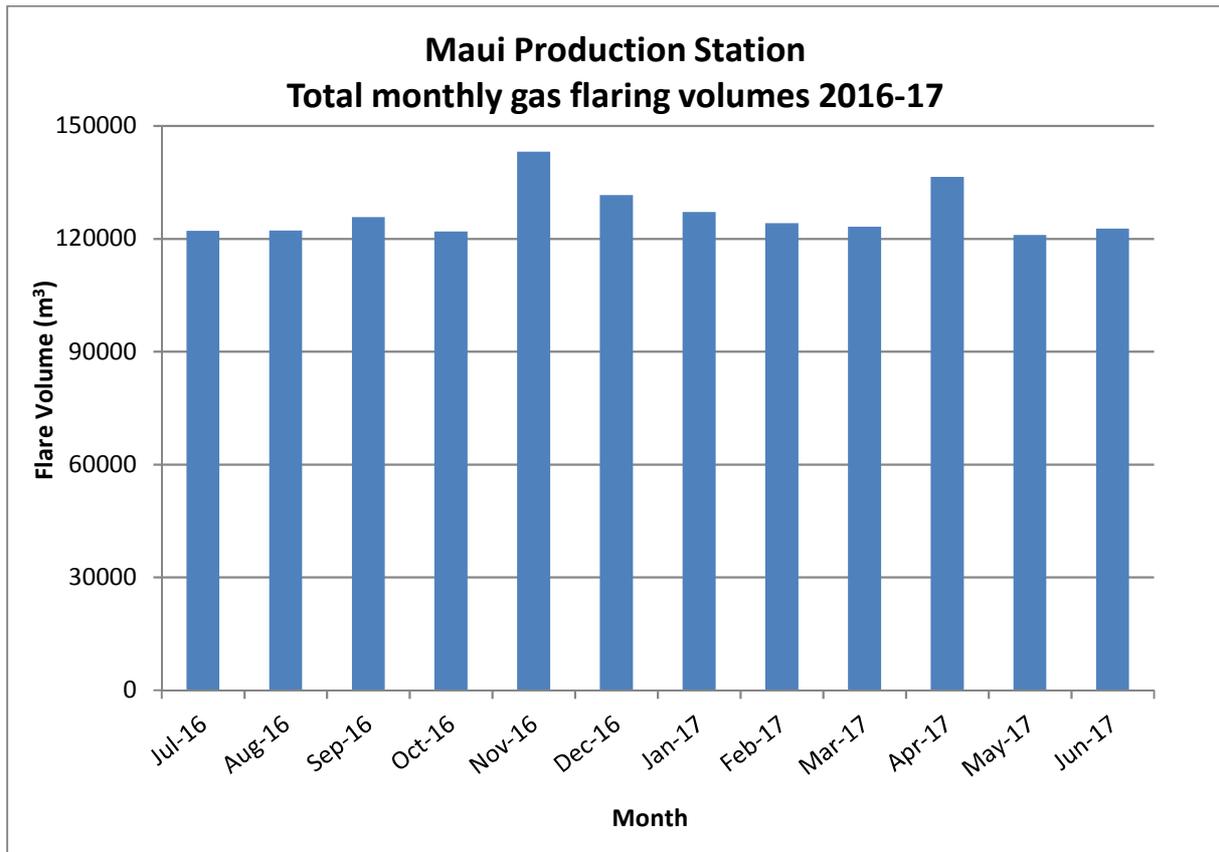


Figure 6 Monthly gas flaring for Maui Production Station under consent 4052-4

STL provided the Council with an annual report on flaring and emissions during the 2016-2017 period, as required by consent 4052-4. A summary of flaring volumes at Maui Production Station is provided in Figure 6. The total volume flared in the 2016-2017 year was 1,521,100 m³ of gas, similar to the previous monitoring period.

Flaring was relatively consistent through the period (around 120,000 m³/month), with a slight increase in November 2016 due to planned depressurisation events for maintenance purposes. In April 2017 an external power fault resulted in additional gas being flared.

Of the 37 flaring events in the period, 35 generated light smoke which was localised and dissipated quickly. The majority of events related to plant shut-downs, process upsets, depressurisation, plant repairs and ongoing maintenance. The median duration of these events was 90 minutes. No complaints were received from the public regarding flaring at the production station.

2.3 Investigations, interventions, and incidents

The monitoring programme for the year was based on what was considered to be an appropriate level of monitoring, review of data, and liaison with the consent holders. During the year matters may arise which require additional activity by the Council, for example provision of advice and information, or investigation of potential or actual causes of non-compliance or failure to maintain good practices. A pro-active approach that in the first instance avoids issues occurring is favoured.

The Council operates and maintains a register of all complaints or reported and discovered excursions from acceptable limits and practices, including non-compliance with consents, which may damage the environment. The incident register includes events where the Company concerned has itself notified the Council. The register contains details of any investigation and corrective action taken.

Complaints may be alleged to be associated with a particular site. If there is potentially an issue of legal liability, the Council must be able to prove by investigation that the identified company is indeed the source of the incident (or that the allegation cannot be proven).

In the 2016-2017 period, the Council was required to undertake significant additional investigations and interventions, or record incidents, in association with conditions in resource consents or provisions in Regional Plans.

A complaint was received on 8 November 2016 regarding a foam discharge into an unnamed tributary from the Fire Training Centre. The discharge had occurred the previous day during rainfall. Investigation found that fire-fighting foam had discharged from an IBC container onto the unsealed surface due to a leak in the container. Rainwater around the area entrained the chemical creating a foaming effect. At the time of inspection no discharges were occurring but the ponded water tracking to a drain foamed when agitated. An Abatement Notice was issued to Wood Group M&O requiring the spill to be cleaned up. Re-inspection found that the abatement notice was being complied with.

3 Discussion

3.1 Discussion of site performance

Monitoring of the Maui Production Station during the 2016-2017 year found that the site was well managed. All consent conditions relating to site operations and management were complied with.

3.2 Environmental effects of exercise of consents

Receiving water inspections, in conjunction with sampling conducted by both the Council and STL during the 2016-2017 period, indicated that the discharges were not causing any adverse effects on the Ngapirau Stream at the time. This was supported by the findings of the macroinvertebrate survey carried out in the stream.

There were no adverse effects noted on the environment resulting from the exercise of the air discharge consent. The ambient air quality monitoring at the site indicated that levels of carbon monoxide, combustible gases, PM10 particulates and nitrogen oxides were all below levels of concern at the time of sampling. No offensive or objectionable odours were detected beyond the boundary during inspections and there were no complaints in relation to air emissions from the site.

3.3 Evaluation of performance

A tabular summary of the consent holder's compliance record for the year under review is set out in Tables 9-13.

Table 9 Summary of performance for consent 0245-3

Purpose: To discharge treated stormwater from the Maui Production Station to the Ngapirau Stream		
Condition requirement	Means of monitoring during period under review	Compliance achieved?
1. Oily water separator and stormwater oil trap operated and maintained correctly	Inspections and sampling	Yes
2. Limits on contaminants in the discharge	Council and Company sampling	Yes
3. No effects in receiving water	Site inspections, sampling and biomonitoring	Yes
4. Contingency plan	Plan approved	Yes
5. Review/change of consent to take account of operational requirements	Not required	N/A
6. Review of consent	No further option for review	N/A
Overall assessment of consent compliance and environmental performance in respect of this consent		High
Overall assessment of administrative performance in respect of this consent		High

N/A = not applicable

Table 10 Summary of performance for consent 0246-3

Purpose: To discharge treated domestic effluent from the oxidation ponds at the Maui Production Station to the Ngapirau Stream		
Condition requirement	Means of monitoring during period under review	Compliance achieved?
1. Oxidation ponds maintained in aerobic condition to meet conditions	Inspections and sampling	Yes
2. No effects in receiving water	Site inspections, sampling and biomonitoring	Yes
3. Upgrade treatment system by November 2000	Upgrade completed	Yes
4. Option to review consent in 2001 to assess effectiveness of upgrade	Not exercised	N/A
5. Review/change of consent to take account of operational requirements	Not required	N/A
6. Review of consent	No further option for review	N/A
Overall assessment of consent compliance and environmental performance in respect of this consent		High
Overall assessment of administrative performance in respect of this consent		High

Table 11 Summary of performance for consent 1228-4

Purpose: To discharge treated stormwater and wastewater from fire-fighting at the Fire Training Centre at the Maui Production Station to the Oaonui Stream (held by Wood Group M & O)		
Condition requirement	Means of monitoring during period under review	Compliance achieved?
1. Settling pond operated and regularly maintained to meet conditions	Site inspections	Yes
2. Limits on contaminants in the discharge	Discharge results provided by consent holder	No - 4 exceedances of suspended solids limit, but all were below the current 100 g/m ³ standard.
3. No chemicals or agents to be discharged without approval	Site inspections and liaison with consent holder	No – one instance of un-banded chemical leaking
4. No effects in receiving water	Site inspections	No – one instance of foaming
5. Contingency plan	Plan approved	Yes

Purpose: To discharge treated stormwater and wastewater from fire-fighting at the Fire Training Centre at the Maui Production Station to the Oaonui Stream (held by Wood Group M & O)		
Condition requirement	Means of monitoring during period under review	Compliance achieved?
6. Review/change of consent to take account of operational requirements	Not required	N/A
7. Review of consent	No further option for review	N/A
Overall assessment of consent compliance and environmental performance in respect of this consent Overall assessment of administrative performance in respect of this consent		Good High

Table 12 Summary of performance for Consent 4052-4

Purpose: To discharge emissions into the air from the refining and distribution of hydrocarbons and associated processes at the Maui Production Station site		
Condition requirement	Means of monitoring during period under review	Compliance achieved?
1. Adoption of best practicable option to minimise adverse effects	Site inspections and liaison with consent holder	Yes
2. Minimise emissions by appropriate selection, operation, supervision, control and maintenance of equipment	Site inspections and liaison with consent holder	Yes
3. Appropriate maintenance and operation of equipment	Site inspections	Yes
4. Treatment of flaring gas by effective liquid separation and recovery	Site inspections	Yes
5. Provision of annual report on flaring to council	Report received	Yes
6. No offensive, obnoxious or objectionable odours beyond site boundary	Site inspections	Yes
7. Limit on maximum ground level concentration of sulphur dioxide	Not measured, sampling in previous years	N/A
8. Limit on maximum ground level concentration of nitrogen oxides	Air quality monitoring	Yes
9. Limit on maximum ground level concentration of carbon monoxide	Air quality monitoring	Yes
10. Limit on maximum ground level concentration of benzene	Not monitored during period under review	N/A

Purpose: To discharge emissions into the air from the refining and distribution of hydrocarbons and associated processes at the Maui Production Station site		
Condition requirement	Means of monitoring during period under review	Compliance achieved?
11. Limit on maximum ground level concentration for other contaminants	Air quality monitoring	Yes
12. Consultation with Council prior to significant alterations to plant, processes, or operations	Site inspections and liaison with consent holder	Yes
13. Notification of flaring more than five minutes in duration	Flaring notifications received	Yes
14. Notification to Council of incidents or hazardous situations	No incidents or hazardous situations to notify this period	Yes
15. Record of smoke emitting events	Site inspections, records kept by consent holder, and liaison with consent holder	Yes
16. Maintenance of log of continuous flaring incidents	Site inspections, records kept by consent holder, and liaison with consent holder	Yes
17. Depressurisation of plant to prevent dense black smoke being discharged from the flare	Site inspections, records kept by consent holder, and liaison with consent holder	Yes
18. Optional review provision	Next option for review in June 2018, recommendation attached	N/A
Overall assessment of consent compliance and environmental performance in respect of this consent		High
Overall assessment of administrative performance in respect of this consent		High

Table 13 Summary of performance for Consent 5224-2

Purpose: To place and maintain two pipelines in, under and over the foreshore and seabed in the coastal marine area between mean high water spring and the outer limit of the territorial sea		
Condition requirement	Means of monitoring during period under review	Compliance achieved?
1. Notify Council before undertaking major maintenance works	No maintenance works undertaken	N/A
2. During maintenance works observe measures to prevent discharge and minimise disturbance	No maintenance works undertaken	N/A
3. Structures to be removed and area reinstated when no longer required	Currently operational	N/A

Purpose: To place and maintain two pipelines in, under and over the foreshore and seabed in the coastal marine area between mean high water spring and the outer limit of the territorial sea		
Condition requirement	Means of monitoring during period under review	Compliance achieved?
4. Review of consent	No further option for review	N/A
Overall assessment of consent compliance and environmental performance in respect of this consent		High High
Overall assessment of administrative performance in respect of this consent		

Table 14 Evaluation of environmental performance over time

Year	Consent no	High	Good	Improvement req	Poor
2010-11	0245-3, 0246-3, 4052-4, 5224-2	3	1		
	1228-4	1			
2011-12	0245-3, 0246-3, 4052-4, 5224-2	3	1		
	1228-4	1			
2012-14	0245-3, 0246-3, 4052-4, 5224-2	3	1		
	1228-4	1			
2014-15	0245-3, 0246-3, 4052-4, 5224-2	4			
	1228-4	1			
2015-16	0245-3, 0246-3, 4052-4, 5224-2	4			
	1228-4		1		
Totals		21	4		

During the year, STL demonstrated an overall high level of both environmental performance and administrative compliance with the resource consents as defined in Section 1.1.4. There were no unauthorised incidents recorded by the Council in relation to STL's activities. The Maui Production Station was well managed and maintained.

During the period under review, Wood Group M & O demonstrated a good level of environmental performance and a high level of administrative compliance with the resource consents. There was one unauthorised incident recorded by the Council in relation to Wood Group M & O's activities.

3.4 Recommendations from the 2015-2016 Annual Report

In the 2015-2016 Annual Report, it was recommended:

1. THAT monitoring of consented activities at the Maui Production Station in the 2016-2017 year continues at the same level as in 2015-2016.

This recommendation was implemented.

3.5 Alterations to monitoring programmes for 2017-2018

In designing and implementing the monitoring programmes for air/water discharges in the region, the Council has taken into account:

- the extent of information already made available through monitoring or other means to date;
- its relevance under the RMA;
- the Council's obligations to monitor consented activities and their effects under the RMA;
- the record of administrative and environmental performances of the consent holder; and
- reporting to the regional community.

The Council also takes into account the scope of assessments required at the time of renewal of permits, and the need to maintain a sound understanding of industrial processes within Taranaki exercising resource consents.

It is proposed that for 2017-2018 the monitoring of consented activities at the Maui Production Station continue at the same level as in 2016-2017.

It should be noted that the proposed programme represents a reasonable and risk-based level of monitoring for the site in question. The Council reserves the right to subsequently adjust the programme from that initially prepared, should the need arise if potential or actual non-compliance is determined at any time during 2017-2018.

3.6 Exercise of optional review of consent

Resource consent 4052-4 provides for an optional review of the consent in June 2018. Condition 18 allows the Council to review the consent in order to deal with significant adverse effects on the environment arising from the exercise of the consent which was not foreseen at the time of the application.

Based on the results of monitoring in the year under review, and in previous years as set out in earlier annual compliance monitoring reports, it is considered that there are no grounds that require a review to be pursued.

4 Recommendations

1. THAT in the first instance, monitoring of consented activities at Maui Production Station in the 2017-2018 year continue at the same level as in 2016-2017.
2. THAT should there be issues with environmental or administrative performance in 2017-2018, monitoring may be adjusted to reflect any additional investigation or intervention as found necessary.
3. THAT the option for a review of resource consent 4052-4 in June 2018, as set out in condition 18 of not be exercised, on the grounds that the current conditions are adequate to deal with any potential adverse effects.

Glossary of common terms and abbreviations

The following abbreviations and terms may be used within this report:

Biomonitoring	Assessing the health of the environment using aquatic organisms.
Bund	A wall around a tank to contain its contents in the case of a leak.
CO	Carbon monoxide
Conductivity	Conductivity, an indication of the level of dissolved salts in a sample, usually measured at 20°C and expressed in mS/m.
g/m ³	Grams per cubic metre, and equivalent to milligrams per litre (mg/L). In water, this is also equivalent to parts per million (ppm), but the same does not apply to gaseous mixtures.
Incident	An event that is alleged or is found to have occurred that may have actual or potential environmental consequences or may involve non-compliance with a consent or rule in a regional plan. Registration of an incident by the Council does not automatically mean such an outcome had actually occurred.
Intervention	Action/s taken by Council to instruct or direct actions be taken to avoid or reduce the likelihood of an incident occurring.
Investigation	Action taken by Council to establish what were the circumstances/events surrounding an incident including any allegations of an incident.
Incident Register	The Incident Register contains a list of events recorded by the Council on the basis that they may have the potential or actual environmental consequences that may represent a breach of a consent or provision in a Regional Plan.
LEL	Lower Explosive Limit (LEL) gives the percentage of the lower explosive limit, expressed as methane, that is detected in the air sampled.
m ²	Square Metres.
mg/m ³	Milligrams per cubic metre.
MCI	Macroinvertebrate community index; a numerical indication of the state of biological life in a stream that takes into account the sensitivity of the taxa present to organic pollution in stony habitats.
mS/m	Millisiemens per metre.
Mixing zone	The zone below a discharge point where the discharge is not fully mixed with the receiving environment. For a stream, conventionally taken as a length equivalent to 7 times the width of the stream at the discharge point.
NO _x	Nitrogen oxides.
NH ₄	Ammonium, normally expressed in terms of the mass of nitrogen (N).
NTU	Nephelometric Turbidity Unit, a measure of the turbidity of water.
O&G	Oil and grease, defined as anything that will dissolve into a particular organic solvent (e.g. hexane). May include both animal material (fats) and mineral matter (hydrocarbons).
pH	A numerical system for measuring acidity in solutions, with 7 as neutral. Numbers lower than 7 are increasingly acidic and higher than 7 are increasingly alkaline. The scale is logarithmic i.e. a change of 1 represents a ten-fold change in strength. For example, a pH of 4 is ten times more acidic than a pH of 5.

Physicochemical	Measurement of both physical properties (e.g. temperature, clarity, density) and chemical determinants (e.g. metals and nutrients) to characterise the state of an environment.
PM ₁₀	Relatively fine airborne particles (less than 10 micrometre diameter, respectively).
Resource consent	Refer Section 87 of the RMA. Resource consents include land use consents (refer Sections 9 and 13 of the RMA), coastal permits (Sections 12, 14 and 15), water permits (Section 14) and discharge permits (Section 15).
RMA	<i>Resource Management Act 1991</i> and including all subsequent amendments.
Separator	A device designed to separate oil and suspended solids from wastewater and stormwater.
SS	Suspended solids.
SQMCI	Semi quantitative macroinvertebrate community index.
Temp	Temperature, measured in °C (degrees Celsius).
Turb	Turbidity, expressed in NTU.
µg/m ³	Micrograms per cubic metre of air.

For further information on analytical methods, contact the Council's laboratory.

Bibliography and references

- Taranaki Regional Council (2017): *Shell Todd Oil Services Ltd Maui and Production Station Monitoring Programme Annual Report 2015-2016*. Technical Report 2016-117
- Taranaki Regional Council (2016): *Shell Todd Oil Services Ltd Maui and Kapuni Production Stations Monitoring Programmes Annual Report 2014-2015*. Technical Report 2015-103
- Taranaki Regional Council (2015): *Shell Todd Oil Services Ltd Maui and Kapuni Production Stations Monitoring Programmes Biennial Report 2012-2014*. Technical Report 2014-41
- Taranaki Regional Council (2012): *Shell Todd Oil Services Ltd Maui and Kapuni Production Stations Monitoring Programmes Annual Report 2011-2012*. Technical Report 2012-35
- Taranaki Regional Council (2011): *Shell Todd Oil Services Ltd Maui and Kapuni Production Stations Monitoring Programmes Annual Report 2010-2011*. Technical Report 2011-74
- Taranaki Regional Council (2010): *Shell Todd Oil Services Ltd Maui and Kapuni Production Stations Monitoring Programmes Annual Report 2009-2010*. Technical Report 2010-98
- Taranaki Regional Council (2009): *Shell Todd Oil Services Ltd Maui and Kapuni Production Stations Monitoring Programmes Annual Report 2008-2009*. Technical Report 2009-28
- Taranaki Regional Council (2008): *Shell Todd Oil Services Ltd Maui and Kapuni Production Stations Monitoring Programmes Annual Report 2007-2008*. Technical Report 2008-14
- Taranaki Regional Council (2007): *Shell Todd Oil Services Ltd Maui and Kapuni Production Stations Monitoring Programmes Annual Report 2006-2007*. Technical Report 2007-72
- Taranaki Regional Council (2007): *Shell Todd Oil Services Maui and Kapuni Monitoring Programme Annual Report 2005-2006*. Technical Report 2006-51
- Taranaki Regional Council (2005): *Shell Todd Oil Services Maui and Kapuni Monitoring Programme Annual Report 2004/2005*. Technical Report 2005-66
- Taranaki Regional Council (2004): *Shell Todd Oil Services Ltd Compliance Monitoring Programme Annual Report 2003/2004*. Technical Report 2004-31
- Taranaki Regional Council (2003): *Shell Todd Oil Services Ltd Compliance Monitoring Programme Annual Report 2002/2003*. Technical Report 2003-63
- Taranaki Regional Council (2002): *Shell Todd Oil Services Ltd Compliance Monitoring Programme Annual Report 2001/2002*. Technical Report 2002-62
- Taranaki Regional Council (2001): *Shell Todd Oil Services Ltd Compliance Monitoring Programme Annual Report 2000/2001*. Technical Report 2001-90
- Taranaki Regional Council (2000): *Shell Todd Oil Services Ltd Compliance Monitoring Programme Annual Report 1999/2000*. Technical Report 00-12
- Taranaki Regional Council (1999): *Shell Todd Oil Services Ltd Compliance Monitoring Programme Annual Report 1998/1999*. Technical Report 99-50
- Taranaki Regional Council (1998): *Shell Todd Oil Services Ltd Compliance Monitoring Programme Annual Report 1997/1998*. Technical Report 98-35
- Taranaki Regional Council (1997): *Shell Todd Oil Services Ltd Compliance Monitoring Programme Annual Report 1996/1997*. Technical Report 97-30

Taranaki Regional Council (1996): *Shell Todd Oil Services Ltd Compliance Monitoring Programme Annual Report 1995/1996*. Technical Report 96-59

Taranaki Regional Council (1995): *Shell Todd Oil Services Ltd Compliance Monitoring Programme Annual Report 1994/1995*. Technical Report 95-35

Taranaki Regional Council (1994): *Shell Todd Oil Services Ltd Compliance Monitoring Programme Annual Report 1993/1994*. Technical Report 94-46

Taranaki Regional Council (1993): *Shell Todd Oil Services Ltd Compliance Monitoring Programme Annual Report 1992/1993*. Technical Report 92-31

Taranaki Regional Council (1992): *Shell Todd Oil Services Ltd Compliance Monitoring Programme Annual Report 1991/1992*. Technical Report 92-31A

Taranaki Regional Council (1991): *Shell Todd Oil Services Ltd Compliance Monitoring Programme Annual Report 1990/1991*. Technical Report 91-31

Taranaki Regional Council (1990): *Shell Todd Oil Services Ltd Compliance Monitoring Programme Annual Report 1989/1990*. Technical Report 90-9

Appendix I

Resource consents held by Shell Taranaki Ltd and Wood Group M & O

(For a copy of the signed resource consent
please contact the TRC Consents department)

Discharge Permit
Pursuant to the Resource Management Act 1991
a resource consent is hereby granted by the
Taranaki Regional Council

Name of Consent Holder: Shell Todd Oil Services Ltd
Private Bag 2035
NEW PLYMOUTH 4342

Decision Date (Change): 4 September 2013

Commencement Date (Change): 4 September 2013 (Granted: 11 October 2000)

Conditions of Consent

Consent Granted: To discharge treated stormwater from the Maui Production Station to the Ngapirau Stream

Expiry Date: 1 June 2018

Site Location: Maui Production Station, Tai Road, Oaonui

Legal Description: Lot 1 DP 11402 Ngatitara 7C Blk XV Opunake SD
(Discharge source & site)

Grid Reference (NZTM) 1669907E-56379680N

Catchment: Ngapirau

*For General, Standard and Special conditions
pertaining to this consent please see reverse side of this document*

General condition

- a) That on receipt of a requirement from the Chief Executive, Taranaki Regional Council (hereinafter the Chief Executive), the consent holder shall, within the time specified in the requirement, supply the information required relating to the exercise of this consent.
- b) That unless it is otherwise specified in the conditions of this consent, compliance with any monitoring requirement imposed by this consent must be at the consent holder's own expense.
- c) That the consent holder shall pay to the Council all required administrative charges fixed by the Council pursuant to section 36 in relation to:
 - i) the administration, monitoring and supervision of this consent; and
 - ii) charges authorised by regulations.

Special conditions

1. The oily water separator and the stormwater oil trap shall be operated and regularly maintained to ensure that the conditions of this consent are met.
2. The discharge shall not exceed the following concentrations:

<u>Contaminant</u>	<u>Concentration</u>
Total recoverable hydrocarbons	15 gm ⁻³
Suspended solids	100 gm ⁻³
3. After allowing for reasonable mixing, within a mixing zone extending 20 metres downstream of the discharge point, the discharge [in conjunction with any other discharge pertaining to the same property] shall not give rise to any of the following effects in the receiving water:
 - a) the production of any conspicuous oil or grease films, scums or foams, or floatable or suspended materials;
 - b) any conspicuous change in colour or visual clarity;
 - c) any emission of objectionable odour;
 - d) the rendering of fresh water unsuitable for consumption by farm animals;
 - e) any significant adverse effects on aquatic life, habitats or ecology.
4. The consent holder shall maintain, and regularly update, a contingency plan, outlining measures and procedures to be undertaken to prevent spillage or accidental discharge of contaminants not licensed by this consent and measures to avoid, remedy or mitigate the environmental effects of such a spillage or discharge.
5. The resource consent holder may apply to the Taranaki Regional Council for a change or cancellation of any of the conditions of this resource consent in accordance with section 127(1)(a) of the Resource Management Act 1991 to take account of operation requirements or the results of monitoring.

Consent 0245-3

6. That the Taranaki Regional Council may review any or all of the conditions of this consent by giving notice of review during June 2006 and/or June 2012, for the purpose of ensuring that the conditions are adequate to deal with any adverse effects on the environment arising from the exercise of this consent, which either were not foreseen at the time the application was considered or which it was not appropriate to deal with at the time.

Signed at Stratford on 4 September 2013

For and on behalf of
Taranaki Regional Council

Director-Resource Management

Discharge Permit
Pursuant to the Resource Management Act 1991
a resource consent is hereby granted by the
Taranaki Regional Council

Name of
Consent Holder: Shell Todd Oil Services Limited
Private Bag 2035
NEW PLYMOUTH

Consent Granted
Date: 11 October 2000

Conditions of Consent

Consent Granted: To discharge treated domestic effluent from the oxidation ponds at the Maui Production Station to the Ngapirau Stream at or about GR: P20:800-999

Expiry Date: 1 June 2018

Review Date(s): June 2006, June 2012

Site Location: Maui Production Station, Tai Road, Oaonui

Legal Description: Lot 1 DP 11402 Pt Ngatitara 6C 6D 6E & 7C Blocks Blk XV
Opunake SD

Catchment: Ngapirau stream between the Oaonui Stream and the Okawe Stream

Consent 0246-3

General conditions

- a) That on receipt of a requirement from the Chief Executive, Taranaki Regional Council (hereinafter the Chief Executive), the consent holder shall, within the time specified in the requirement, supply the information required relating to the exercise of this consent.
- b) That unless it is otherwise specified in the conditions of this consent, compliance with any monitoring requirement imposed by this consent must be at the consent holder's own expense.
- c) That the consent holder shall pay to the Council all required administrative charges fixed by the Council pursuant to section 36 in relation to:
 - i) the administration, monitoring and supervision of this consent; and
 - ii) charges authorised by regulations.

Special conditions

1. The consent holder shall properly and efficiently maintain and operate the oxidation ponds system, which shall be regularly maintained in an aerobic condition, to ensure that the conditions of this consent are met.
2. That after allowing for reasonable mixing, within a mixing zone extending 20 metres below the discharge point, the discharge [in conjunction with any other discharges pertaining to the same property] shall not give rise to any of the following effects in the receiving waters:
 - a) the production of any conspicuous oil or grease films, scums or foams, or floatable or suspended materials;
 - b) any conspicuous change in the colour or visual clarity;
 - c) any emission of objectionable odour;
 - d) the rendering of fresh water unsuitable for consumption by farm animals;
 - e) any significant adverse effects on aquatic life, habitats or ecology.
3. The consent holder shall upgrade the treatment system to avoid effects as a result of algal blooms in the oxidation ponds. The upgrade shall be in accordance with the URS New Zealand Ltd 30 August 2000 report recommendations and be completed by 30 November 2000.
4. The Taranaki Regional Council may review any or all of the conditions of this consent by giving notice of review during June 2001, for the purpose of assessing the effectiveness of works required under special condition 3.
5. The resource consent holder may apply to the Taranaki Regional Council for a change or cancellation of any of the conditions of this resource consent in accordance with section 127(1)(a) of the Resource Management Act 1991 to take account of operation requirements or the results of monitoring.

Consent 0246-3

6. The Taranaki Regional Council may review any or all of the conditions of this consent by giving notice of review during June 2006 and/or June 2012, for the purpose of ensuring that the conditions are adequate to deal with any significant adverse effects on the environment arising from the exercise of this consent, which either were not foreseen at the time the application was considered or which it was not appropriate to deal with at the time.

Signed at Stratford on 11 October 2000

For and on behalf of
Taranaki Regional Council

Chief Executive

Discharge Permit
Pursuant to the Resource Management Act 1991
a resource consent is hereby granted by the
Taranaki Regional Council

Name of
Consent Holder: M & O Pacific Limited
P O Box 265
NEW PLYMOUTH 4340

Consent Granted
Date: 11 October 2000

Conditions of Consent

Consent Granted: To discharge treated stormwater and wastewater from fire fighting at the Fire Training Centre at the Maui Production Station to the Oaonui Stream at or about (NZTM) 1669945E-5638740N

Expiry Date: 1 June 2018

Review Date(s): June 2006, June 2012

Site Location: Fire Training Centre, Maui Production Station,
Tai Road, Oaonui

Legal Description: Ngatitara 7C Block Blk XV Opunake SD

Catchment: Oaonui

General conditions

- a) That on receipt of a requirement from the Chief Executive, Taranaki Regional Council (hereinafter the Chief Executive), the consent holder shall, within the time specified in the requirement, supply the information required relating to the exercise of this consent.
- b) That unless it is otherwise specified in the conditions of this consent, compliance with any monitoring requirement imposed by this consent must be at the consent holder's own expense.
- c) That the consent holder shall pay to the Council all required administrative charges fixed by the Council pursuant to section 36 in relation to:
 - i) the administration, monitoring and supervision of this consent; and
 - ii) charges authorised by regulations.

Special conditions

1. The settling ponds shall be operated and regularly maintained to ensure that the conditions of this consent are met.
2. The discharge shall not exceed the following concentrations:

<u>Contaminant</u>	<u>Concentration</u>
Total recoverable hydrocarbons	15 gm ⁻³
Suspended solids	50 gm ⁻³
3. That, other than specified in condition 2, no chemicals or agents may be discharged without the written approval of the Chief Executive, of the Taranaki Regional Council.
4. After allowing for reasonable mixing, within a mixing zone extending 10 metres downstream of the discharge point, the discharge shall not give rise to any of the following effects in the receiving water:
 - a) the production of any conspicuous oil or grease films, scums or foams, or floatable or suspended materials;
 - b) any conspicuous change in colour or visual clarity;
 - c) any emission of objectionable odour;
 - d) the rendering of fresh water unsuitable for consumption by farm animals;
 - e) any significant adverse effects on aquatic life, habitats or ecology.
5. The consent holder shall maintain, and regularly update, a contingency plan, outlining measures and procedures to be undertaken to prevent spillage or accidental discharge of contaminants not licensed by this consent and measures to avoid, remedy or mitigate the environmental effects of such a spillage or discharge.

Consent 1228-4

6. The resource consent holder may apply to the Taranaki Regional Council for a change or cancellation of any of the conditions of this resource consent in accordance with section 127(1)(a) of the Resource Management Act 1991 to take account of operation requirements or the results of monitoring.
7. That the Taranaki Regional Council may review any or all of the conditions of this consent by giving notice of review during June 2006 and/or June 2012, for the purpose of ensuring that the conditions are adequate to deal with any adverse effects on the environment arising from the exercise of this consent, which either were not foreseen at the time the application was considered or which it was not appropriate to deal with at the time.

Transferred at Stratford on 24 November 2009

For and on behalf of
Taranaki Regional Council

Director-Resource Management

Discharge Permit
Pursuant to the Resource Management Act 1991
a resource consent is hereby granted by the
Taranaki Regional Council

Name of Consent Holder: Shell Todd Oil Services Ltd
Private Bag 2035
NEW PLYMOUTH 4342

Decision Date (Change): 9 August 2013

Commencement Date (Change): 9 August 2013 [Granted: 9 January 2003]

Conditions of Consent

Consent Granted: To discharge emissions into the air from the refining and distribution of hydrocarbons and associated processes at the Maui Production Station site

Expiry Date: 1 June 2024

Review Date(s): June 2018

Site Location: Maui Production Station, Tai Road, Oaonui

Legal Description: Ngatitara 6D & 6E Blk XVI Lot 1 DP 11402 Opunake SD

Grid Reference (NZTM) 1670046E-5638140N

*For General, Standard and Special conditions
pertaining to this consent please see reverse side of this document*

General conditions

- a) On receipt of a requirement from the Chief Executive, Taranaki Regional Council the consent holder shall, within the time specified in the requirement, supply the information required relating to the exercise of this consent.
- b) Unless it is otherwise specified in the conditions of this consent, compliance with any monitoring requirement imposed by this consent must be at the consent holder's own expense.
- c) The consent holder shall pay to the Council all required administrative charges fixed by the Council pursuant to section 36 in relation to:
 - i) the administration, monitoring and supervision of this consent; and
 - ii) charges authorised by regulations.

Special conditions

1. The consent holder shall adopt the best practicable option, as defined in section 2 of the Resource Management Act 1991, to prevent or minimise any actual or likely adverse effect on the environment associated with the discharge of contaminants into the air from the site.
2. The consent holder shall minimise the emissions and impacts of air contaminants discharged from the site by the selection of the most appropriate process equipment, process control equipment, emission control equipment, methods of control, supervision and operation, and the proper and effective operation, supervision, control and maintenance of all equipment and processes.
3. All equipment used to avoid, remedy, or mitigate any effect on the environment from the discharge of emissions into the air shall be maintained in good condition and shall be operated within design parameters at all times that the plant is in operation.
4. The consent holder shall undertake effective liquid separation and recovery, as far as is practicable, to avoid or mitigate smoke emissions during flaring.
5. The consent holder shall provide to the Taranaki Regional Council during August of each year, for the duration of this consent, a report:
 - a) detailing gas combustion in the flares under condition 16, such information to be compiled on a month by month basis;
 - b) detailing smoke emissions as required under condition 15;
 - c) detailing any measures to reduce smoke emissions;
 - d) detailing any measures to reduce flaring;
 - e) providing data on the emitted and/or ambient concentrations and/or mass discharge rates and/or an emission inventory, of such contaminants the Chief Executive, Taranaki Regional Council, may from time to time specify;
 - f) detail current measures by the consent holder to improve plant efficiency on the site; and
 - g) addressing any other issue relevant to the minimisation or mitigation of emissions from the flares or from elsewhere on the site.

Consent 4052-4

6. The discharges authorised by this consent shall not give rise to any offensive or obnoxious or objectionable odour at or beyond the site boundary in the opinion of an enforcement officer of the Taranaki Regional Council.
7. The consent holder shall control all emissions of sulphur dioxide to the atmosphere from the site, in order that the maximum ground level concentration of sulphur dioxide arising from the exercise of this consent measured under ambient conditions does not exceed $350 \mu\text{g m}^{-3}$ [one-hour average exposure] or $125 \mu\text{g m}^{-3}$ [twenty-four hour average exposure] at or beyond the boundary of the site.
8. The consent holder shall control all emissions of nitrogen oxides to the atmosphere from the site, in order that the maximum ground level concentration of nitrogen dioxide arising from the exercise of this consent measured under ambient conditions does not exceed $100 \mu\text{g m}^{-3}$ [twenty-four hour average exposure], or $200 \mu\text{g m}^{-3}$ [one-hour average exposure] at or beyond the boundary of the site.
9. The consent holder shall control all emissions of carbon monoxide to the atmosphere from the flare, whether alone or in conjunction with any other emissions from the site arising through the exercise of any other consent, in order that the maximum ground level concentration of carbon monoxide arising from the exercise of this consent measured under ambient conditions does not exceed 10mg m^{-3} [eight-hour average exposure], or 30mg m^{-3} one-hour average exposure] at or beyond the boundary of the property on which the production station flare is located.
10. The consent holder shall control all emissions of benzene to the atmosphere from the site, in order that the maximum ground level concentration of benzene arising from the exercise of this consent measured under ambient conditions does not exceed the relevant Ministry for the Environment Ambient Air Quality Guideline for benzene [$10 \mu\text{g m}^{-3}$ [annual average exposure] from 2002 until 2010 and $3.6 \mu\text{g m}^{-3}$ [annual average exposure] from 2010] at or beyond the boundary of the site.
11. The consent holder shall control all emissions to the atmosphere from the site of contaminants other than carbon dioxide, sulphur dioxide, carbon monoxide, and nitrogen oxides, in order that the maximum ground level concentration for any particular contaminant arising from the exercise of this consent measured at or beyond the boundary of the site is not increased above background levels:
 - a) by more than 1/30th of the relevant Occupational Threshold Value-Time Weighted Average, or by more than the Short Term Exposure Limit at any time, [all terms as defined in Workplace Exposure Standards, 2002, Department of Labour]; or
 - b) if no Short Term Exposure Limit is set, by more than three times the Time Weighted Average at any time, [all terms as defined in Workplace Exposure Standards, 2002, Department of Labour].
12. Prior to undertaking any alterations to the plant, processes or operations, which may significantly change the nature or quantity of contaminants emitted to air from the site, the consent holder shall first consult with the Chief Executive, Taranaki Regional Council, and shall obtain any necessary approvals under the Resource Management Act.
13. The consent holder shall whenever practicable notify the Chief Executive, Taranaki Regional Council, whenever the continuous flaring of hydrocarbons (other than purge gas) is expected to occur for more than five minutes in duration.

Consent 4052-4

14. Any incident having air environment impact or potential impact which has or is liable to cause significant substantiated complaint or a hazardous situation beyond the boundary of the consent holder's site, shall be notified to the Taranaki Regional Council, as soon as possible, followed by a written report to the Chief Executive, Taranaki Regional Council, within one week of the incident, with comment about the measures taken to minimise the impact of the incident and to prevent re-occurrence.
15. The consent holder shall keep and make available to the Chief Executive, upon request, a record of all smoke emitting incidents, noting time, duration and cause. The consent holder shall also keep, and make available to the Chief Executive, upon request, a record of all complaints received as a result of the exercise of this consent.
16. The consent holder shall keep and maintain a log of all continuous flaring incidents longer than five minutes, and any intermittent flaring lasting for an aggregate of ten minutes or longer in any 120-minute period. Such a log shall contain the date, the start and finish times, the quantity and type of material flared, and the reason for flaring. This log shall be made available to the Chief Executive upon request, and summarised annually in the report required under condition 5. All practicable steps shall be taken to minimise flaring.
17. Other than in emergencies, or during tests or exercises to simulate emergencies to a maximum frequency of twice per year, depressurisation of the plant, or sections of the plant, shall be carried out over a sufficient period of time to prevent dense black smoke from being discharged from the flares.
18. Subject to the provisions of this condition, the Council may within six months of receiving a report prepared by the consent holder pursuant to condition 5 of this consent but not more often than once every three years, or in June 2006 and/or June 2012 and/or June 2018, serve notice that it intends to review the conditions of this resource consent in accordance with section 128(1)(a) of the Resource Management Act 1991 for the purposes of:
 - a) dealing with any significant adverse effect on the environment arising from the exercise of the consent which was not foreseen at the time the application was considered or which it was not appropriate to deal with; and/or
 - b) requiring the consent holder to adopt the best practicable option to remove or reduce any adverse effect on the environment caused by the discharge; and/or
 - c) to alter, add or delete limits on mass discharge quantities or discharge or ambient concentrations of any contaminant or contaminants; and/or
 - d) taking into account any Act of Parliament, regulation, national policy statement or national environmental standard which relates to limiting, recording, or mitigating emissions of carbon dioxide, sulphur dioxide, nitrogen dioxide and/or benzene, and which is relevant to the air discharge from the Maui Production Station.

Signed at Stratford on 09 August 2013

For and on behalf of
Taranaki Regional Council

TRK985224

COASTAL PERMIT

**Pursuant to the RESOURCE MANAGEMENT ACT 1991
a resource consent is hereby granted by the
Taranaki Regional Council**

Name of SHELL TODD OIL SERVICES LIMITED
Consent Holder: PRIVATE BAG 2035 NEW PLYMOUTH

Granted Date: 10 March 1998

CONDITIONS OF CONSENT

Consent Granted: TO PLACE AND MAINTAIN TWO PIPELINES IN, UNDER AND OVER THE FORESHORE AND SEABED IN THE COASTAL MARINE AREA BETWEEN MEAN HIGH WATER SPRING AND THE OUTER LIMIT OF THE TERRITORIAL SEA AT OR ABOUT GR: P20:782-999

Expiry Date: 1 June 2025

Review Date[s]: June 2005 and June 2015

Site Location: OAONU BEACH TO OUTER LIMIT OF THE TERRITORIAL SEA, OAONU

Catchment: TASMAN SEA 904.000

For General, Standard and Special Conditions pertaining to this consent please see reverse side of this document.

TRK985224

General conditions

- a) That on receipt of a requirement from the General Manager, Taranaki Regional Council (hereinafter the General Manager), the consent holder shall, within the time specified in the requirement, supply the information required relating to the exercise of this consent.
- b) That unless it is otherwise specified in the conditions of this consent, compliance with any monitoring requirement imposed by this consent must be at the consent holder's own expense.
- c) That the consent holder shall pay to the Council all required administrative charges fixed by the Council pursuant to section 36 in relation to:
 - i) the administration, monitoring and supervision of this consent; and
 - ii) charges authorised by regulations.

Special Conditions

- 1. THAT the consent holder shall notify the Taranaki Regional Council at least 48 hours prior to undertaking any major maintenance works which could involve disturbance of, or discharge to, the coastal marine area.
- 2. THAT during any subsequent maintenance works, the consent holder must observe every practicable measure to prevent the discharge of silt and/or debris and/or any other contaminants to, and to minimise the disturbance of, the bed of the coastal marine area.
- 3. THAT where practicable, the structures licensed by this consent shall be removed and the area reinstated, if and when they are no longer required, to the satisfaction of the General Manager, Taranaki Regional Council.
- 4. THAT the Taranaki Regional Council may review any or all of the conditions of this consent by giving notice of review during the month of June 2005 and/or June 2015, for the purpose of ensuring that the conditions adequately deal with the environmental effects arising from the exercise of this consent, which were not foreseen at the time the application was considered and which it was not appropriate to deal with at that time.

Signed at Stratford on 10 March 1998

For and on behalf of
TARANAKI REGIONAL COUNCIL

DIRECTOR—RESOURCE MANAGEMENT

Consent 4052-4

Director-Resource Management

Appendix II

Biomonitoring report

To Callum McKenzie; Job Manager
From Bart Jansma; Scientific Officer
Report No BJ304
Doc No 1928320
Date 7 September 2017

Biomonitoring of an unnamed coastal stream (Ngapirau Stream) in relation to waste discharges from the Shell Todd Oil Services Ltd Maui Production Station, February 2017

Introduction

This mid summer biological survey of an unnamed coastal stream receiving wastewater from the Maui gas treatment plant at Oaonui was the only survey scheduled for the 2016-2017 monitoring year. The results from surveys performed since the 2001-2002 monitoring year are discussed in reports referenced later in this report.

Methods

Macroinvertebrates were collected from sites 2 and 3, in an unnamed coastal stream (Table 1, Figure 1), on 22 February 2017 by the Taranaki Regional Council. This survey has been delayed due to a particularly wet start to the summer. The sampling method employed was the 'streambed-kick' sampling technique, which is very similar to Protocol C1 (hard-bottomed, semi-quantitative), of the New Zealand Macroinvertebrate Working Group (NZMWG) protocols for macroinvertebrate samples in wadeable streams (Stark et al, 2001). Site 1 was removed from the monitoring programme in the 2001-2002 monitoring year due to fluctuating flows (a tendency to dry up in summer), which influenced the results obtained from this site.

Samples were preserved with Kahle's Fluid for later sorting and identification under a stereomicroscope according to Taranaki Regional Council methodology, which is very similar to protocol P1 of NZMWG protocols for sampling macroinvertebrates in wadeable streams (Stark et al. 2001). Macroinvertebrate taxa found in each sample were recorded as:

R (rare) = less than 5 individuals;
C (common) = 5-19 individuals;
A (abundant) = estimated 20-99 individuals;
VA (very abundant) = estimated 100-499 individuals;
XA (extremely abundant) = estimated 500 individuals or more.

Table 1 Biomonitoring sites in an unnamed coastal stream related to the Maui Production Station

Site No.	Site Code	GPS Reference (NZTM)	Location
2	NPR 000100	E1669554 N5637641	Approximately 500 m downstream of discharges
3	NPR 000190	E1668603 N5637217	Approximately 1600 m downstream of discharges

Stark (1985) developed a scoring system for macroinvertebrate taxa according to their sensitivity to organic pollution in stony New Zealand streams. Highly 'sensitive' taxa were assigned the highest scores of 9 or 10, while the most 'tolerant' forms scored 1. Sensitivity scores for certain taxa have been modified in accordance with Taranaki experience. Averaging the scores assigned to the taxa found at a site, and multiplying the average by a scaling factor of 20 produces a Macroinvertebrate Community Index (MCI) value.

The MCI was designed as a measure of the overall sensitivity of macroinvertebrate communities to the effects of organic pollution. MCI results can also reflect the effects of warm temperatures, slow current speeds and low dissolved oxygen levels, because the taxa capable of tolerating these conditions generally have low sensitivity scores. Usually more 'sensitive' communities (with higher MCI values) inhabit less polluted waterways.

A semi-quantitative MCI value (SQMCI_s) has also been calculated for the taxa present at each site by multiplying each taxon score by a loading factor (related to its abundance), totalling these products, and dividing by the sum of the loading factors (Stark, 1998 and 1999). The loading factors were 1 for rare (R), 5 for common (C), 20 for abundant (A), 100 for very abundant (VA) and 500 for extremely abundant (XA). Unlike the MCI, the SQMCI_s is not multiplied by a scaling factor of 20, therefore SQMCI_s values range from 1 to 10, while MCI values range from 20 to 200.

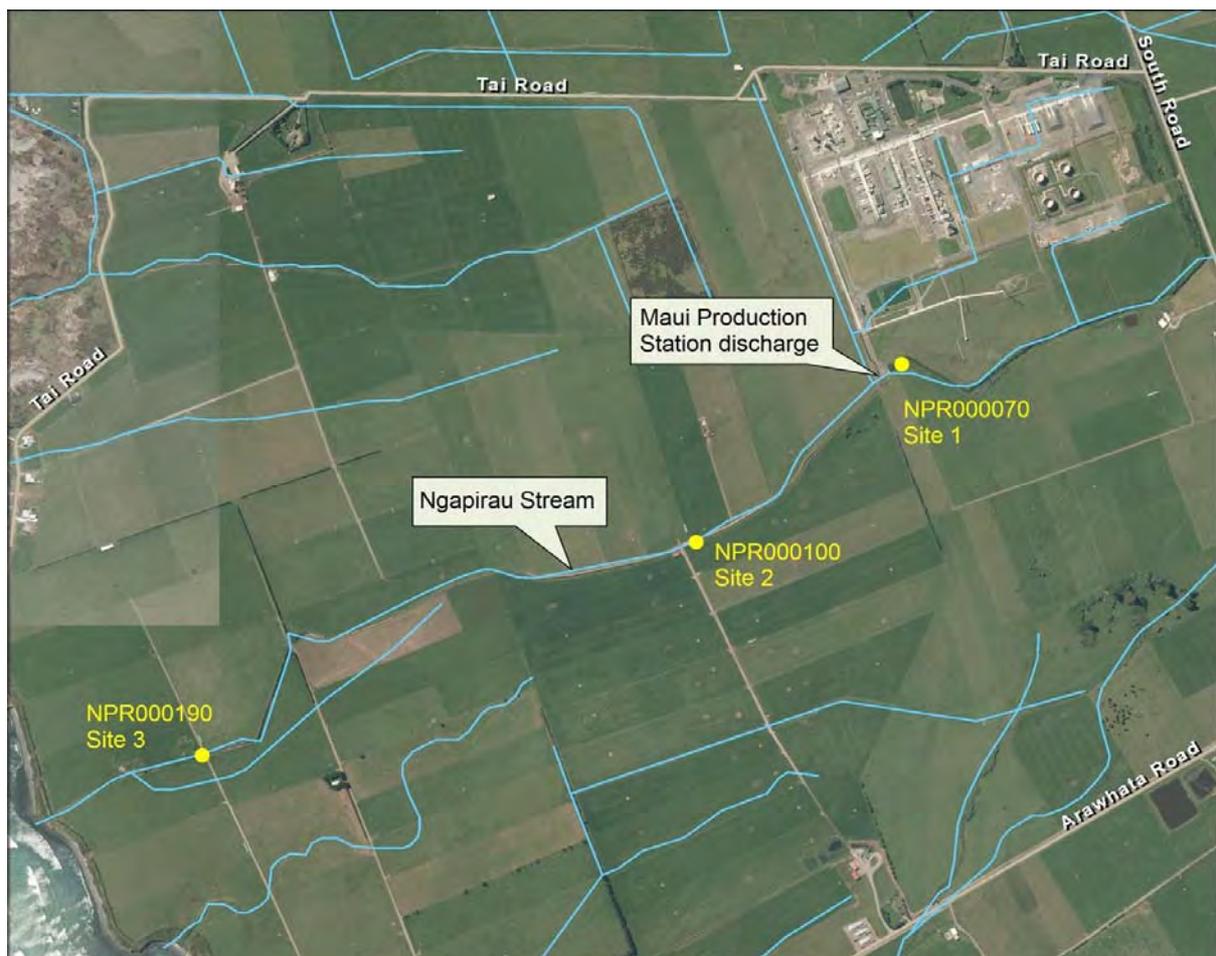


Figure 1 Biomonitoring sites in the unnamed ('Ngapirau') coastal stream adjacent to the Maui Production Station

Results and discussion

At the time of this midday survey, the water temperatures in the stream were 21.7°C at site 2, approximately 500m downstream of the production station and 19.7°C at site 3, approximately 1,600m downstream of the production station. The low and steady stream flow was uncoloured and clear at both sites and followed a short recession period, 19 days after the most recent fresh (above 3 times median flow) in the nearby Punehu Stream.

The streambed was comprised mainly of bedrock, gravels and cobbles at site 2, with the addition of some silt and sand. The substrate at site 3 was relatively soft, and was dominated by sand, silt and gravels. Site 2 had a similar degree of algal growth as that noted in the previous survey, with slippery films and widespread patches of filamentous growth observed. This compares well with the extensive patchy algal mats (some in floating mats) and widespread filamentous algae observed in December 2013. Site 3 had a reduced algal biomass as site 2, with a slippery film but no filamentous algal growth observed here. Site 2 was partially unshaded whereas site 3 was completely shaded. Site 2 supported some macrophyte growth, but only on the edges, while no macrophytes were present in the sampled reach at site 3. Discolouration caused by an unauthorised dairy effluent discharge to the stream upstream of the Maui Production Station discharge had been noted on some previous survey occasions but has not been seen to be occurring for at least the last nine surveys. With similar flow conditions compared with the previous survey, habitat in the stream was above average, and a moderately sized sample was collected.

Microscopic analysis revealed that there were no 'undesirable heterotrophic growths' at either site consistent with the visual absence of such growths, at the time of this early summer survey.

Macroinvertebrate communities

This drain-like stream typically supports macroinvertebrate communities of limited taxonomic richness, with relatively low proportions of 'sensitive' taxa, as reflected by the MCI values. Results from previous surveys are summarised in Table 2, together with current results which are also illustrated in Figure 2.

Table 2 Numbers of taxa and MCI values recorded in previous surveys performed since June 1988 in the unnamed coastal stream receiving wastes from the Maui Production Station at Oaonui, together with current results

Site	N	Numbers of taxa			MCI values			SQMCI ₅ (N=26)		
		Range	Median	Current survey	Range	Median	Current survey	Range	Median	Current survey
2	46	8-21	15	17	44-75	63	78	1.1-4.4	2.4	4.5
3	35	9-26	16	13	58-75	66	80	1.3-4.7	2.7	4.4

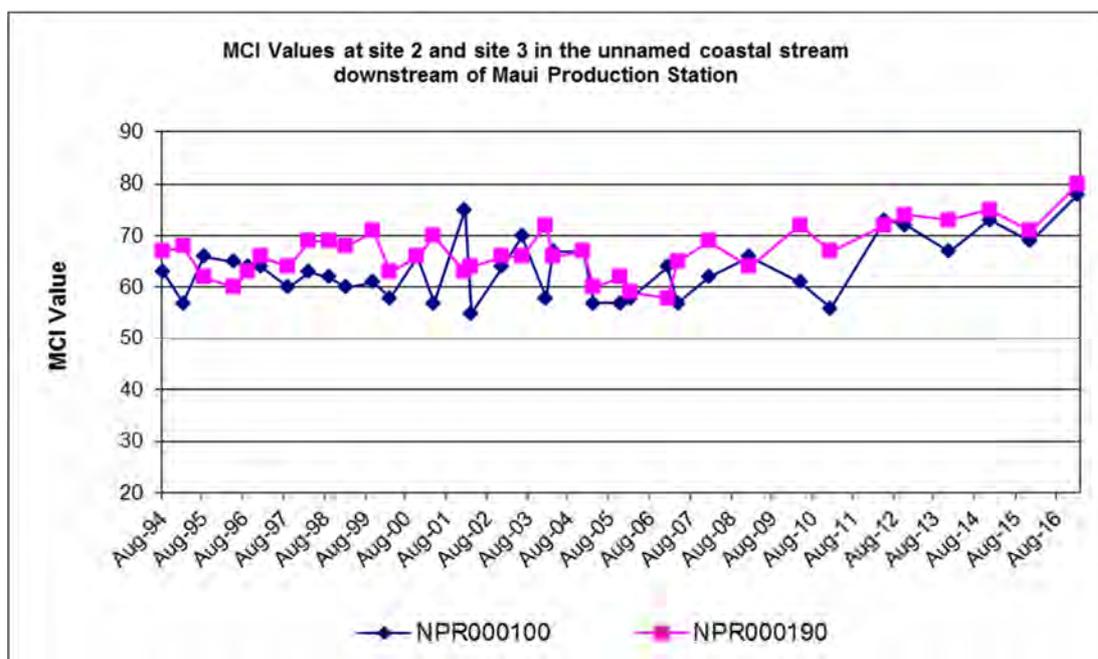


Figure 2 MCI values recorded in the unnamed ('Ngapirau') coastal stream that receives discharges from the Maui Production Station since August 1994

Table 3 Macroinvertebrate fauna of an unnamed coastal stream ('Ngapirau' Stream) in relation to the Maui Production Station, sampled on 7 December 2015

Taxa List	Site Number	MCI score	2	3
	Site Code		NPR000100	NPR000190
	Sample Number		FWB17108	FWB17109
ANNELIDA (WORMS)	Oligochaeta	1	C	C
	Lumbricidae	5	C	C
MOLLUSCA	Physa	3	C	-
	Potamopyrgus	4	XA	XA
	Sphaeriidae	3	R	-
CRUSTACEA	Ostracoda	1	C	C
	Isopoda	5	R	C
	Paracalliope	5	XA	XA
HEMIPTERA (BUGS)	Saldula	5	R	-
COLEOPTERA (BEETLES)	Elmidae	6	-	R
	Hydrophilidae	5	-	R
MEGALOPTERA (DOBSONFLIES)	Archichauliodes	7	R	-
TRICHOPTERA (CADDISFLIES)	Hydrobiosis	5	-	R
	Oxyethira	2	R	-
	Tripletides	5	R	C
DIPTERA (TRUE FLIES)	Aphrophila	5	C	-
	Hexatomini	5	R	-
	Orthoclaadiinae	2	R	R
	Austrosimulium	3	C	A
ACARINA (MITES)	Acarina	5	A	R
No of taxa			17	13
MCI			78	80
SQMCIs			4.5	4.4
EPT (taxa)			1	2
%EPT (taxa)			6	15
'Tolerant' taxa		'Moderately sensitive' taxa		'Highly sensitive' taxa

R = Rare C = Common A = Abundant VA = Very Abundant XA = Extremely Abundant

Site 2

A moderate richness of seventeen taxa was found at site 2, which was two more than the median of previous values recorded at this site (Table 2) and similar to that recorded in the previous survey. The community was dominated by one 'tolerant' taxon (extremely abundant snail (*Potamopyrgus*)) and two 'moderately sensitive' taxa (extremely abundant *Paracalliope* amphipods and abundant acarina mites).

This site's habitat supported a community that was a reduced proportion of 'tolerant' taxa (47% of taxa number) from the previous survey, resulting in the 'poor' MCI score of 78 units. This score was fifteen units higher than the median of all previous scores, a statistically significant result (Stark, 1998), and nine units higher than that recorded in the previous survey (Table 2, Figure 2). It is also the highest MCI score recorded at this site to date. The extreme abundance of the 'tolerant' snail *Potamopyrgus* was tempered by the extreme abundance of the 'moderately sensitive' amphipod *Paracalliope* resulting in an SQMCI_s score of 4.5 units. Although this indicates that only fair water quality preceded this survey, this score is significantly higher than the median SQMCI_s score for this site (by 1.8 units), and is the highest SQMCI_s score recorded at this site to date, indicating better than average water quality. In general, the current results are well above average for this site, and not reflective of any impacts caused by the Maui Production Station discharge.

Site 3

A reduced community richness of thirteen taxa was found at site 3 (when compared with the previous survey), three taxa fewer than the median richness for this site, and four fewer than that recorded upstream (Table 2). The community was dominated by two 'tolerant' taxa (extremely abundant snail (*Potamopyrgus*) and abundant sandfly larvae (*Austrosimulium*)), and one 'moderately sensitive' taxon (extremely abundant amphipods (*Paracalliope*)).

This softer-bottomed, nutrient enriched habitat supported a community dominated by 'sensitive' taxa (62% of taxa number), resulting in the MCI score of 80 units. This score is 14 units higher than the median MCI score for this site, also a statistically significant result. It was also the highest MCI score recorded at this site to date, and two units higher than recorded at site 2 upstream (Figure 2, Table 2). As with site 2, the extreme abundance of the 'tolerant' snail *Potamopyrgus* was tempered by the extreme abundance of 'moderately sensitive' amphipod *Paracalliope*. This resulted in a similar SQMCI_s score (4.4 units), which is significantly higher than the median for this site, and continues the above average trend observed in the previous five surveys. Community compositions were relatively dissimilar at the two sites with only 50% of the total taxa (20) found in the reach of the stream surveyed, present at both sites.

Conclusions

This mid summer 2017 biomonitoring survey of a small coastal stream that receives wastewater (including treated sewage) from the Maui Production Station was undertaken during a relatively wet summer period, with the stream being in recession for 19 days prior to this survey. Results indicated that the wastewater discharge had not had an impact on the macroinvertebrate communities of the stream, although the poor physical habitat conditions of this drain-like watercourse are not suitable for most 'sensitive' invertebrate taxa, and this may often limit the degree of impact of the discharges on the biological communities. The absence of 'heterotrophic growths' at both sites also indicated a lack of impacts of the discharge on the stream, with no clear improvement in the quality of the macroinvertebrate communities with distance downstream. The MCI values were very similar at sites 2 and 3, despite the slightly improved habitat at site 3, primarily through improved shading and reduced algal growth. Both MCI values were the highest recorded to date at the sites sampled. Overall, the scores at both sites were reflective of the poor habitats

over the summer period. In general, the current results are well above average for this site, and not reflective of any impacts caused by the Maui Production Station discharge.

Summary

The Council's standard 'streambed-kick' technique was used at two established sites to collect streambed macroinvertebrates from an unnamed coastal stream on 22 February 2017. Sampling had been delayed due to a wet start to the summer period. Samples were sorted and identified to provide number of taxa (richness) and MCI and SQMCI₅ scores for each site.

The MCI is a measure of the overall sensitivity of the macroinvertebrate community to the effects of organic pollution in stony streams. It is based on the presence/absence of taxa with varying degrees of sensitivity to pollution, and may reveal more subtle changes in communities, particularly if non-organic impacts are occurring.

Significant differences in either the MCI or the SQMCI between sites indicate the degree of adverse effects (if any) of the discharges being monitored.

This mid-summer macroinvertebrate survey indicated that the discharge of treated wastes from the Maui Production Station site had not had any significant detrimental effect on the macroinvertebrate communities of the stream in comparison with the historical condition of these communities to date. The macroinvertebrate communities found at two sites downstream of the site discharge reflected the poor habitat present during a period of low flow conditions in summer, but also indicated that the water quality that preceded this survey was well above average.

The macroinvertebrate communities of the stream contained few 'sensitive' taxa. However, two 'sensitive' taxa were found in abundance at site 2, and one at site 3. At both sites, taxonomic richness (number of taxa) was similar to the long-term median, although there was a reduction in richness between sites 2 and 3. The MCI scores were the highest recorded to date at these sites. Similarly, the SQMCI₅ scores recorded at both sites were the also amongst the highest recorded to date for these sites, with most of these high results recorded in recent surveys. This indicates ongoing improvement in water quality and/or instream habitat.

The MCI and SQMCI₅ scores indicated that the stream communities were of well above average but still 'poor' to fair 'health', although probably typical of communities in drain-like habitats in early summer.

References

- Colgan, B, 2003: Biomonitoring of an unnamed coastal stream in relation to waste discharges from the Shell Todd Oil Services Ltd Maui Production Station, June 2003. TRC report BC003.
- Dunning KJ, 2002a: Biomonitoring of an unnamed coastal stream in relation to waste discharges from the Shell Todd Oil Services Ltd Maui Production Station, January 2002. TRC report KD99.
- Dunning KJ, 2002b: Biomonitoring of an unnamed coastal stream in relation to waste discharges from the Shell Todd Oil Services Ltd Maui Production Station, March 2002. TRC report KD111.
- Dunning KJ & CR Fowles, 2002c: Biomonitoring of an unnamed coastal stream in relation to waste discharges from the Shell Todd Oil Services Ltd Maui Production Station, December 2002. TRC report CF279.
- Fowles CR, 2004: Biomonitoring of an unnamed coastal stream in relation to waste discharges from the Shell Todd Oil Services Ltd Maui Production Station, March 2004. TRC report CF319.

- Fowles CR & Hope KJ, 2005: Biomonitoring of an unnamed coastal stream in relation to waste discharges from the Shell Todd Oil Services Ltd Maui Production Station, March 2005. TRC report CF384.
- Fowles CR & Jansma B, 2007: Biomonitoring of an unnamed coastal stream in relation to waste discharges from the Shell Todd Oil Services Ltd Maui Production Station, January 2007. TRC report CF425.
- Fowles CR & Jansma B, 2007: Biomonitoring of an unnamed coastal stream in relation to waste discharges from the Shell Todd Oil Services Ltd Maui Production Station, April 2007. TRC report CF426.
- Fowles CR & Jansma B, 2008: Biomonitoring of an unnamed coastal stream in relation to waste discharges from the Shell Todd Oil Services Ltd Maui Production Station, January 2008. TRC report CF457.
- Hope KJ, 2006: Biomonitoring of an unnamed coastal stream (Ngapirau Stream) in relation to waste discharges from the Shell Todd Oil Services Ltd Maui Production Station, November 2005. TRC report KH081.
- Hope KJ, 2006: Biomonitoring of an unnamed coastal stream (Ngapirau Stream) in relation to waste discharges from the Shell Todd Oil Services Ltd Maui Production Station, February 2006. TRC report KH082.
- Jansma B, 2009: Biomonitoring of an unnamed coastal stream in relation to waste discharges from the Shell Todd Oil Services Ltd Maui Production Station, January 2009. TRC report BJ067.
- Jansma B, 2011: Biomonitoring of an unnamed coastal stream (Ngapirau Stream) in relation to waste discharges from the Shell Todd Oil Services Ltd Maui Production Station, April 2010. TRC report BJ131.
- Jansma B, 2011: Biomonitoring of an unnamed coastal stream (Ngapirau Stream) in relation to waste discharges from the Shell Todd Oil Services Ltd Maui Production Station, January 2011. TRC report BJ159.
- Jansma B, 2012: Biomonitoring of an unnamed coastal stream (Ngapirau Stream) in relation to waste discharges from the Shell Todd Oil Services Ltd Maui Production Station, May 2012. TRC Report BJ176.
- Jansma B, 2013: Biomonitoring of an unnamed coastal stream (Ngapirau Stream) in relation to waste discharges from the Shell Todd Oil Services Ltd Maui Production Station, November 2012. TRC Report BJ194.
- Jansma B, 2014: Biomonitoring of an unnamed coastal stream (Ngapirau Stream) in relation to waste discharges from the Shell Todd Oil Services Ltd Maui Production Station, December 2014. TRC Report BJ257.
- Jansma B, 2016: Biomonitoring of an unnamed coastal stream (Ngapirau Stream) in relation to waste discharges from the Shell Todd Oil Services Ltd Maui Production Station, December 2015. TRC Report BJ284.
- Moore SC & Colgan BC, 2004: Biomonitoring of an unnamed coastal stream in relation to waste discharges from the Shell Todd Oil Services Ltd Maui Production Station, January 2004. TRC report SM587
- Stark JD, 1985: A macroinvertebrate community index of water quality for stony streams. *Water and Soil* Miscellaneous Publication No. 87.
- Stark JD, 1998: SQMCI: a biotic index for freshwater macroinvertebrate coded abundance data. *New Zealand Journal of Marine and Freshwater Research* 32(1): 55-66.

Stark JD, 1999: An evaluation of Taranaki Regional Council's SQMCI biomonitoring index. Cawthron Institute, Nelson. Cawthron Report No. 472.

Stark JD, Boothroyd IKG, Harding JS, Maxted JR, Scarsbrook MR, 2001: Protocols for sampling macroinvertebrates in wadeable streams. New Zealand Macroinvertebrate

Thomas B & Jansma B, 2014: Biomonitoring of an unnamed coastal stream (Ngapirau Stream) in relation to waste discharges from the Shell Todd Oil Services Ltd Maui Production Station, December 2013. TRC report BT022.

Working Group Report No. 1. Prepared for the Ministry for the Environment. Sustainable Management Fund Project No. 5103. 57p.

Appendix III

Air monitoring report

To Job Manager, Callum MacKenzie
From Scientific Officer - Air Quality, Brian Cheyne
Document 1874287
Date May 31, 2017

Ambient Gas (PM10, NO_x, CO and LEL) Monitoring at Maui Production Stations during 2016-2017 monitoring year

Introduction

In August 2016 and January 2017 as part of the compliance monitoring programme for the Maui production station, a survey of ambient air quality sampling was carried out by the Taranaki Regional Council (the Council) in the vicinity of the plant. The main objectives were to measure:

- The concentrations of PM10 using a portable data logging TSI 'DustTrak';
- To measure the concentrations of the nitrogen oxides (NO_x) using a passive sampling method, that gives a result for average exposure;
- And to measure carbon monoxide (CO) using a portable multi gas meter that provides instantaneous data throughout the monitoring period.

The findings of this study are presented in this memorandum, together with the locations of the monitoring sites which are provided in Figure 1.

Carbon monoxide (CO) and Lower explosive limit (LEL)

During the monitoring year, a multi-gas meter was deployed on one occasion in the vicinity of the plant. The deployment lasted approximately 72 hours, with the instrument placed in a down-wind position at the start of the deployment. Monitoring consisted of continuous measurements of gas concentrations for the gases of interest (carbon monoxide and combustible gases).

Because of the nature of the activities on the site, it was considered that the primary information of interest in respect of gases potentially emitted from the site was the average downwind concentration, rather than any instantaneous peak value. That is, the long-term exposure levels, rather than short-term maxima, are of most interest. The gas meter was therefore set up to create a data set based on recording the average concentration measured during each minute as raw data.



Figure 1 Air monitoring sites at Maui production station (2016-2017)

The details of the sample run are summarised in Table 1 and the data from the sample run are presented graphically in Figure 2.

The consents covering air discharges from the Maui production station have specific limits related to particular gases. Special condition 9 of consent 4052-4 set a limit on the carbon monoxide concentration at or beyond the production station's boundary. The limit is expressed as 10 mg/m³ for an eight hour average or 30 mg/m³ for a one hour average exposure. The maximum concentration of carbon monoxide found during the monitoring run was 13.4 mg/m³ with average concentration for the entire dataset was only 0.6 mg/m³ which comply with consent conditions. This is in line with the pattern found in previous years.

Table 1 Results of carbon monoxide and LEL monitoring at Maui production station (2016-2017)

Period (from-to)		11/08/2016 17:06 to 14/08/2016 16:30
Max	CO(ppm)	11.7
	LEL(%)	0.20
Mean	CO(ppm)	0.50
	LEL(%)	0.00
Min	CO(ppm)	0.00
	LEL(%)	0.00

Note: (1) the instrument records in units of ppm. At 25°C, 1 atm.

$$1\text{ppm CO} = 1.145 \text{ mg/m}^3$$

- (2) See text for explanation of LEL. Because the LEL of methane is equivalent to a mixture of approximately 5% methane in air, then the actual concentration of methane in air can be obtained by dividing the percentage LEL by 20.

LEL gives the percentage of the lower explosive limit, expressed as methane that is detected in the air sampled. The sensor on the instrument reacts to gases and vapours such as acetone, benzene, butane, methane, propane, carbon monoxide, ethanol, and higher alkanes and alkenes, with varying degrees of sensitivity. The Council's Regional Air Quality Plan has a typical requirement that no discharge shall result in dangerous levels of airborne contaminants, including any risk of explosion. At no time did the level of explosive gases downwind of the Maui production station reach any more than a trivial level.

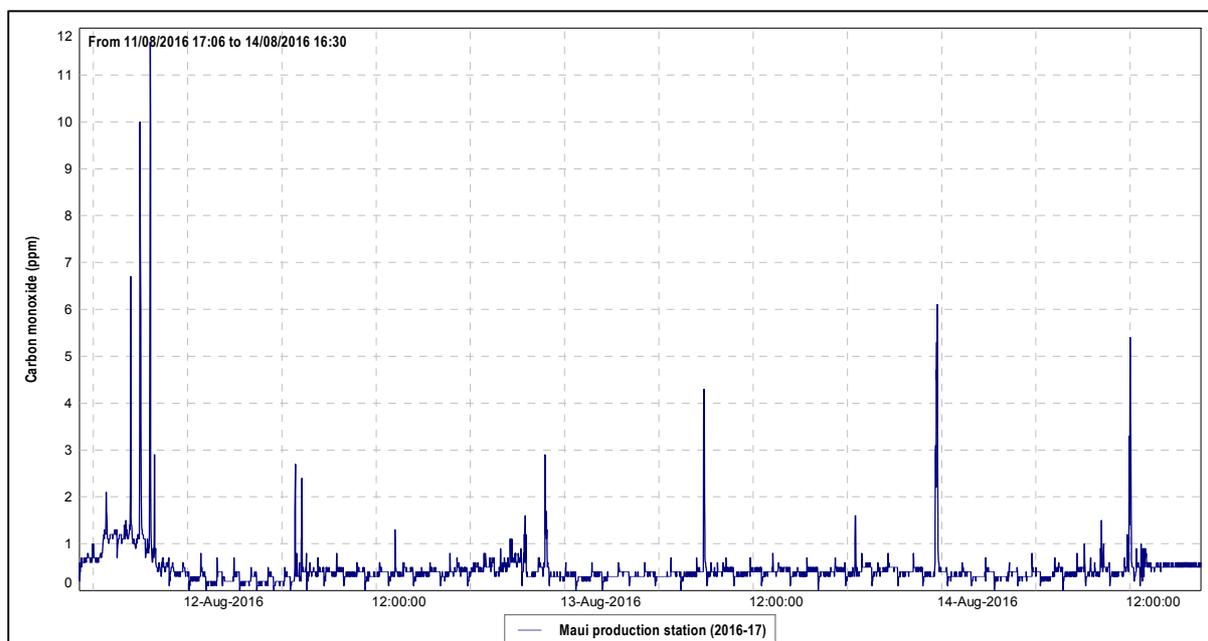


Figure 2 Graph of ambient CO levels in the vicinity of the Maui Production Station (2016-2017)

PM10

In September 2004 the Ministry for the Environment made public National Environmental Standards (NESs) relating to certain air pollutants. The NES for PM10 is 50 $\mu\text{g}/\text{m}^3$ (24-hour average).

Particulates can be derived from many sources, including motor vehicles (particularly diesel), solid and oil-burning processes for industry and power generation, incineration and waste burning, photochemical processes, and natural sources such as pollen, abrasion, and sea spray.

PM10 particles are linked to adverse health effects that arise primarily from the ability of particles of this size to penetrate the defences of the human body and enter deep into the lungs significantly reducing the exchange of gases across the lung walls. Health effects from inhaling PM10 include increased mortality and the aggravation of existing respiratory and cardiovascular conditions such as asthma and chronic pulmonary diseases.

During the reporting period, a "DustTrak" PM10 monitor was deployed on one occasion in the vicinity of the Maui production station. The deployment lasted approximately 31 hours, with the instrument placed in a down-wind position at the start of the deployment. Monitoring consisted of continual measurements of PM10 concentrations. The location of the "DustTrak" monitor during the sampling run is shown in Figure 1.

The details of the sample run are presented in Figure 3 and Table 2.

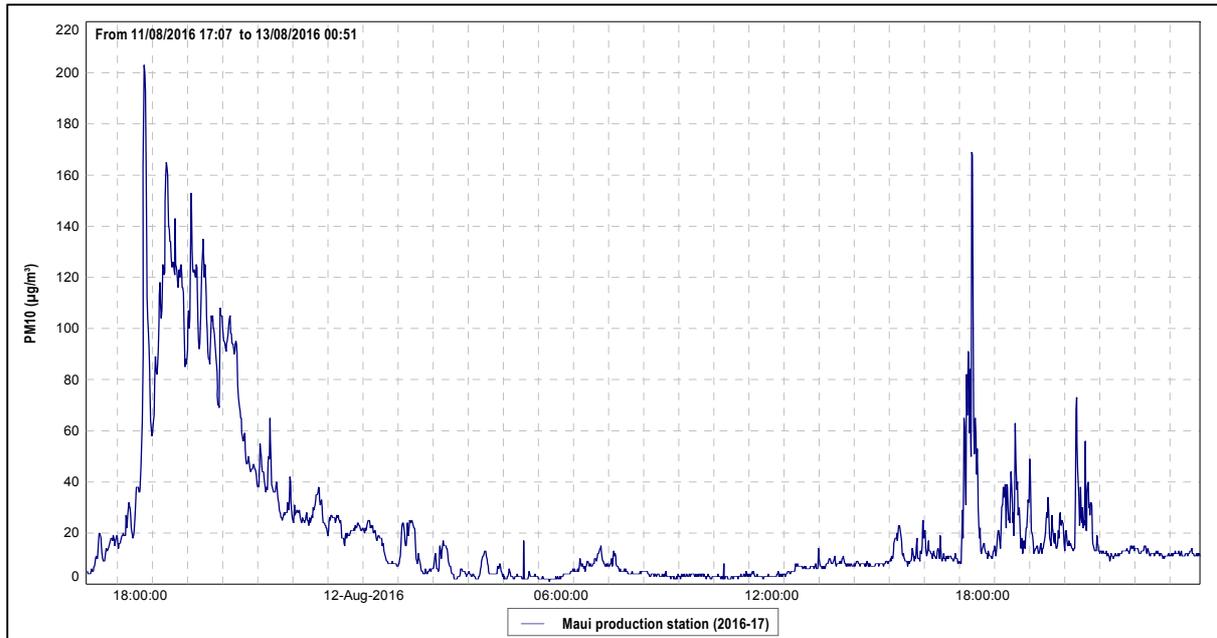


Figure 2 PM10 concentrations ($\mu\text{g}/\text{m}^3$) at the Maui production station (2016-2017)

Table 1 Daily mean of PM10 results during two days' monitoring at Maui production station

	(31 hours) (11-13/08/2016)	
24 hr. set	Day 1	Day 2
Daily average	23.0 $\mu\text{g}/\text{m}^3$	11.2 $\mu\text{g}/\text{m}^3$
NES	50 $\mu\text{g}/\text{m}^3$	

During the 31-hour run, from 11th to 13th of August 2016, the average recorded PM₁₀ concentration for the first 24 hour period was 23 $\mu\text{g}/\text{m}^3$ and 11 $\mu\text{g}/\text{m}^3$ for the second 24 hour period. These daily means equate to 46% and 22%, respectively, of the 50 $\mu\text{g}/\text{m}^3$ value that is set by the National Environmental Standard.

Background levels of PM₁₀ in the region have been found to be typically around 11 $\mu\text{g}/\text{m}^3$.

Nitrogen oxides (NOx)

From 2014 onwards, the Council has implemented a coordinated region-wide compliance monitoring programme to measure NOx. The programme involves deploying all measuring devices at 28 NOx monitoring sites (including two sites in the vicinity of the Maui production station) on the same day, with retrieval three weeks later. This approach assists the Council in further evaluating the effects of local and regional emission sources and ambient air quality in the region.

The complete report covering region-wide NOx monitoring is attached to this memorandum (TRC #1841084).

The consents covering air discharges from the Maui production station have specific limits related to particular gases. Special condition 8 of consent 4052-4 set a limit on the nitrogen dioxide concentration at

or beyond the production station's boundary. The limit is expressed as $100 \mu\text{g}/\text{m}^3$ for a 24 hour average or $200 \mu\text{g}/\text{m}^3$ for a one hour average exposure.

NO_x passive adsorption discs were placed at two locations in the vicinity of the Maui production station on one occasion during the year under review. The discs were left in place for a period of 21 days.

The calculated 1-hour and 24-hour theoretical maximum NO_x concentrations found at the Maui production station during the year under review equates to $0.9 \mu\text{g}/\text{m}^3$ and $0.5 \mu\text{g}/\text{m}^3$ respectively. The results show that the ambient ground level concentration of NO_x is well below the limits set out by consent 4052-4.

